

UDC 621.165

## EFFECT OF BLADE MATERIAL OF STEAM TURBINE ROTOR ON AEROELASTIC CHARACTERISTICS

**Yurii A. Bykov**[bykow@ipmach.kharkov.ua](mailto:bykow@ipmach.kharkov.ua)

ORCID: 0000-0001-7089-8993

**Liubov V. Kolodiazna**[gnesin@ukr.net](mailto:gnesin@ukr.net)

ORCID: 0000-0001-5469-4325

Anatolii Pidhornyi Institute  
of Power Machines and  
Systems of NAS of Ukraine,  
2/10, Komunalnykiv str.,  
Kharkiv, 61046, Ukraine

*Elements of powerful steam turbines are subjected to significant unsteady loads, in particular the rotor blades of the last stages. These loads, in some cases, can cause self-excited oscillations, which are extremely dangerous and have a negative impact on the efficiency and service life of the blade cascade. Therefore, when designing new or modernizing existing steam turbine stages, it is recommended to study the aeroelastic characteristics of the blades. The conditions for the occurrence of self-excited oscillations are influenced by both the geometric characteristics and the alloy from which the blade is made. To determine the effect of the blade material on the aeroelastic behaviour, a numerical analysis of the aeroelastic characteristics of the last stage blades made of steel and titanium alloy was performed. For the analysis, the method of simultaneous modeling of unsteady gas flow through the blade cascades and elastic vibrations of the blades (coupled problem) was used, which allows obtaining the amplitude-frequency spectrum of the interaction of unsteady loads and blade vibrations. The paper presents the results of numerical analysis for harmonic oscillations with a given amplitude and a given inter-blade phase angle, as well as for the regime of coupled vibration of blades under the action of unsteady aerodynamic forces. The dependences of the aerodamping coefficient on the inter-blade phase angle and the distribution of the coefficient along the blade are presented. The results of modeling the coupled vibration of the blades for the first six natural forms are presented in the form of a time-evolving displacement of the blade peripheral section, as well as forces and moments acting on the peripheral section. The corresponding amplitude-frequency spectra of displacements and loads in the peripheral section are also presented. The analysis of the results showed an insignificant difference in the characteristics of the proposed blade materials. For the first natural form of blade oscillations, the possibility of self-excited oscillations was found, and for the second form, there are conditions for the appearance of stable self-oscillations.*

**Keywords:** aeroelasticity, flutter, steam turbine, modal method, CFD, fluid-structure interaction.

### Introduction

Turbine blades, regardless of their purpose, are subjected to significant unsteady aerodynamic loads over the entire range of operating conditions. These loads can be caused by non-uniformity of the inlet flow, unsteady flow in the blade channels, and the interaction of blade vibrations and flow. Under certain conditions, self-excited blade oscillations can occur even if the natural frequencies of the blade and flow oscillations do not match. This phenomenon of interaction between flow and blade oscillations in turbomachinery is dangerous and can cause damage, largely affecting the last stages of steam turbines [1–4]. Similar aeroelastic phenomena appear in other blade devices, in particular, in wind turbines [5], fans [6–10], compressors [11–14], etc.

Modeling of aeroelasticity consists in solving the problem of interaction between two physical media (liquid and elastic), i.e., simultaneous integration of the equations of motion of a fluid and an elastic solid. The fastest method is to solve the problem in the frequency domain [15–17]. This method requires linearization of the nonstationary equations of motion of the fluid, so it is effective for cases of small amplitudes of excitations in flows where nonlinearity does not appear (without separation, close to the flow of an inviscid fluid). To take into account the nonlinear effects of the interaction between the fluid and the blade, it is necessary to simultaneously solve the full Navier-Stokes equations of turbulent fluid motion and blade motion with the exchange of data on the boundaries [18–20].

Modern problems of studying aeroelasticity require the development of methods that allow modeling in a wide range of turbomachinery operating conditions. The most promising method for studying the aeroelastic behavior of turbomachinery blades is modeling three-dimensional unsteady flow and modeling blade motion by modal method (coupled aeroelastic problem) [21–22]. This method allows modeling both forced

---

This work is licensed under a Creative Commons Attribution 4.0 International License.

© Yurii A. Bykov, Liubov V. Kolodiazna, 2024

oscillations and self-excited oscillations of the blades, and also makes it possible to identify the conditions for the occurrence of increasing blade oscillations, which can lead to the occurrence of a flutter.

In this work, a mathematical model of viscous gas flow described by a system of unsteady Navier-Stokes equations averaged over Reynolds is used, complemented by the SST turbulence model by Menter [23]. The unsteady motion of the blades is described by a system of differential equations using a modal approach. Numerical modeling was performed using the ANSYS Fluent Academic Edition 19R3 software package with additional in-house developed program modules.

**Problem formulation**


The described numerical method was used to analyze the aeroelastic behavior of the rotor blade cascade of the last stage of the low-pressure unit of a 1000 MW steam turbine. The rotor blades were studied after improvement using the state-of-the-art method [24], the length of the improved blades increased from 1200 to 1650 mm. A partial study of the aeroelastic characteristics of this rotor has already been conducted, which did not reveal the threat of self-excited oscillations [25]. This study was conducted using the already proven method [26], which is widely used to analyze aeroelasticity in turbomachines.

In the described method, as in [26], the integration of the equations of viscous gas flow (Reynolds-averaged Navier-Stokes equations) and the equations of blade oscillations under the action of unsteady loads (modal method) is performed sequentially at each time step. The study was carried out for the nominal operating mode of the turbine rotor blade with a rotation speed of  $n=1500$  rpm. The primary criterion for blade resistance to flutter is the result of analyzing the characteristics of blade vibration damping under given harmonic vibrations at different inter-blade phase angles.

Fig. 1 shows fragments of the computation mesh in the meridional plane (Fig. 1, a), the tangential plane (root section of the blade, Fig. 1, b), peripheral section of the blade, Fig. 1, c). Each of the segments of the computational domain is discretized using a hybrid deformable H-O mesh.

The operation mode of the turbine blade cascade is characterized by the following distribution of gas-dynamic parameters:

- variable along the radius total pressure and total temperature of the flow at the inlet  $P_0=14708...19101$  Pa;  $T_0=325...333$  K;
- the flow angles in the circumferential ( $\alpha$ ) and radial ( $\gamma$ ) directions are given;
- static pressure behind the cascade variable along the radius  $P_2=3824...3826$  Pa.

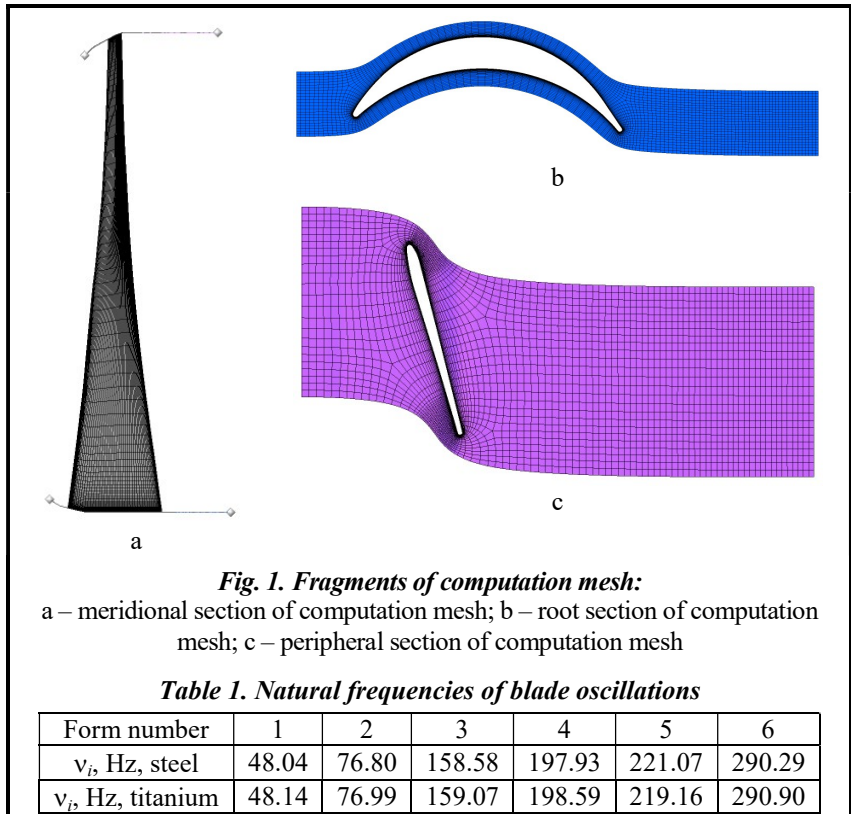


The natural oscillation forms of the rotor blades were determined using the Pre-Stress Modal algorithm from the ANSYS package. Two variants of blade material were considered: instrumental steel (Young's modulus  $E=2 \times 10^{11}$  Pa, Poisson's ratio  $\nu=0.3$ , and density  $\rho=7850$  kg/m<sup>3</sup>) and titanium alloy (Young's modulus  $E=1.138 \times 10^{11}$  Pa, Poisson's ratio  $\nu=0.3399$ , and density  $\rho=4429$  kg/m<sup>3</sup>). To model the blade motion using the modal method, the first six natural oscillation modes were taken into account. The values of the blades' natural frequencies are given in Table 1. The difference in the natural frequencies does not exceed 0.8%, and in the natural forms – no more than 1%, depending on the blade material.


**Results of numerical analysis**

The first task of the study was to determine the aeroelastic characteristics of the rotor according to a given blade vibration law. In this case, the blades perform harmonic oscillations in each of their natural forms separately with a constant inter-blade phase angle (IBPA)  $\delta=0^\circ; 180^\circ; \pm 90^\circ$ . A measure of the stability of oscillations to the flutter is the aerodamping coefficient  $D$ , which is equal to the work of aerodynamic forces with the opposite sign. Positive values of the coefficient correspond to damping of oscillations, and negative values correspond to possible excitation.

Figs. and 3 show the distribution by blade height of the dimensionless aero-damping coefficient  $D$  for four values of the IBPA for steel and titanium blades, respectively.

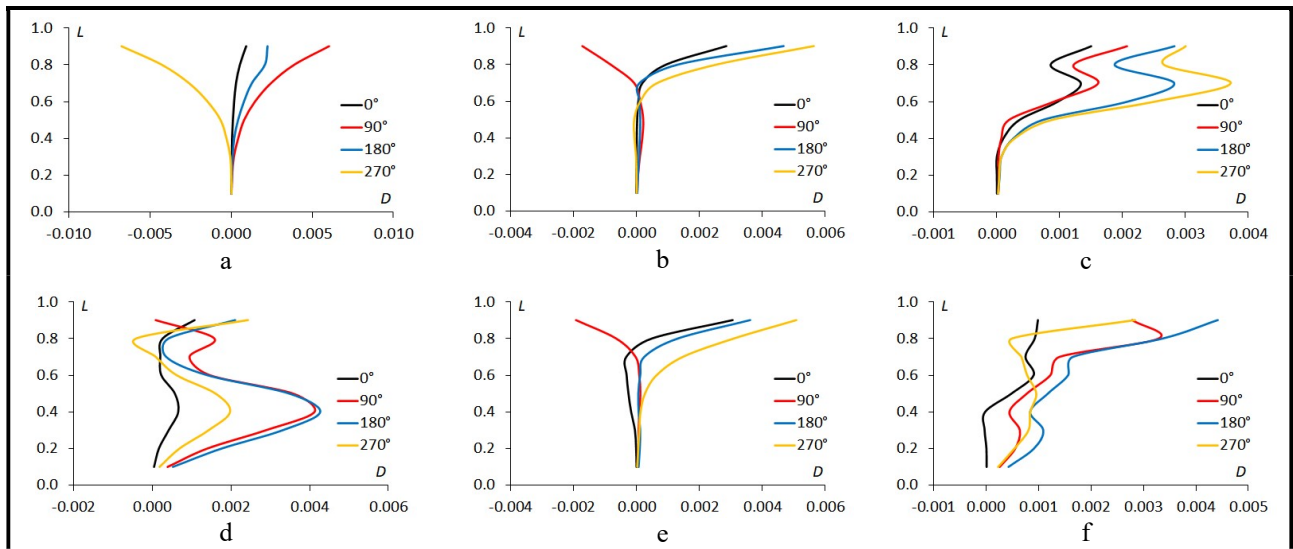


**Fig. 2. Variation of aerodamping coefficient by steel blade height for IBPA=0°, 90°, 180°, 270°:**  
a – 1<sup>st</sup> form; b – 2<sup>nd</sup> form; c – 3<sup>rd</sup> form; d – 4<sup>th</sup> form; e – 5<sup>th</sup> form; f – 6<sup>th</sup> form

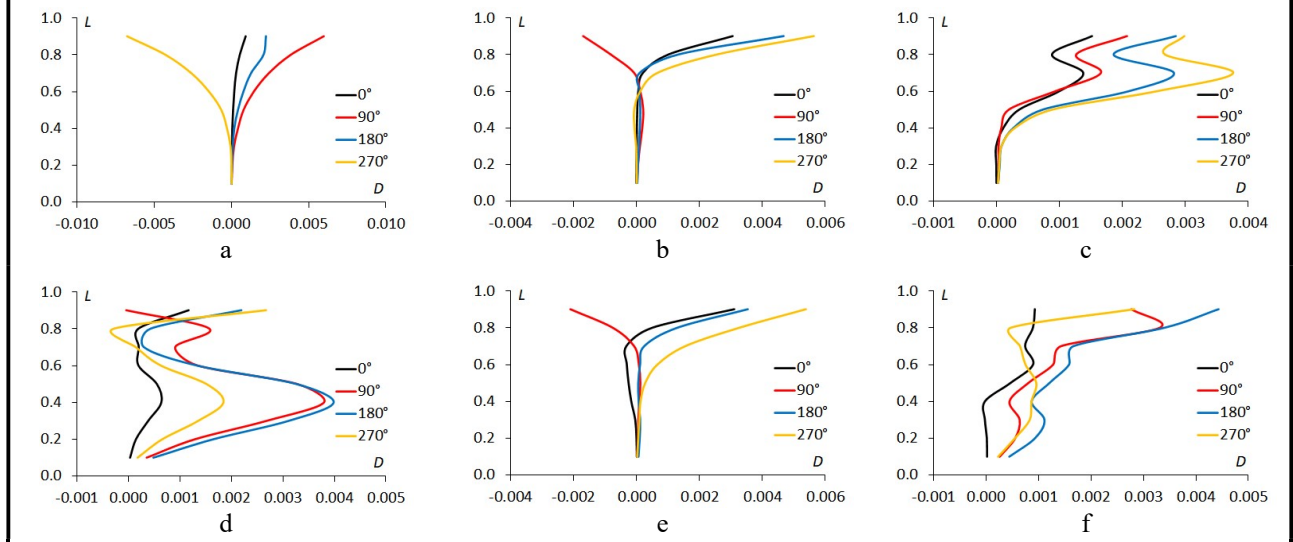

**Fig. 3. Variation of aerodamping coefficient by titanium blade height for IBPA = 0°, 90°, 180°, 270°:**  
a – 1<sup>st</sup> form; b – 2<sup>nd</sup> form; c – 3<sup>rd</sup> form; d – 4<sup>th</sup> form; e – 5<sup>th</sup> form; f – 6<sup>th</sup> form

In most cases, positive values of the aerodamping coefficient are observed, with the exception of form 1 and IBPA=270°, form 2 and IBPA=90°, and form 5 and IBPA=90°. The distribution of work by blade height for steel and titanium is almost the same, as shown in Fig. 4, which shows the dependence of the aerodamping coefficient  $D$  on the IBPA for the two blade materials simultaneously. These graphs confirm that oscillation damping is mainly observed, with the exception of form 1 and IBPA=270°, form 2 and IBPA=90°, and form 5 and IBPA=90°.

The pattern and values of the aero-damping coefficients are practically the same for steel and titanium. The maximum deviation does not exceed 7% (4<sup>th</sup> natural form, IBPA=90°, Fig. 4, d).

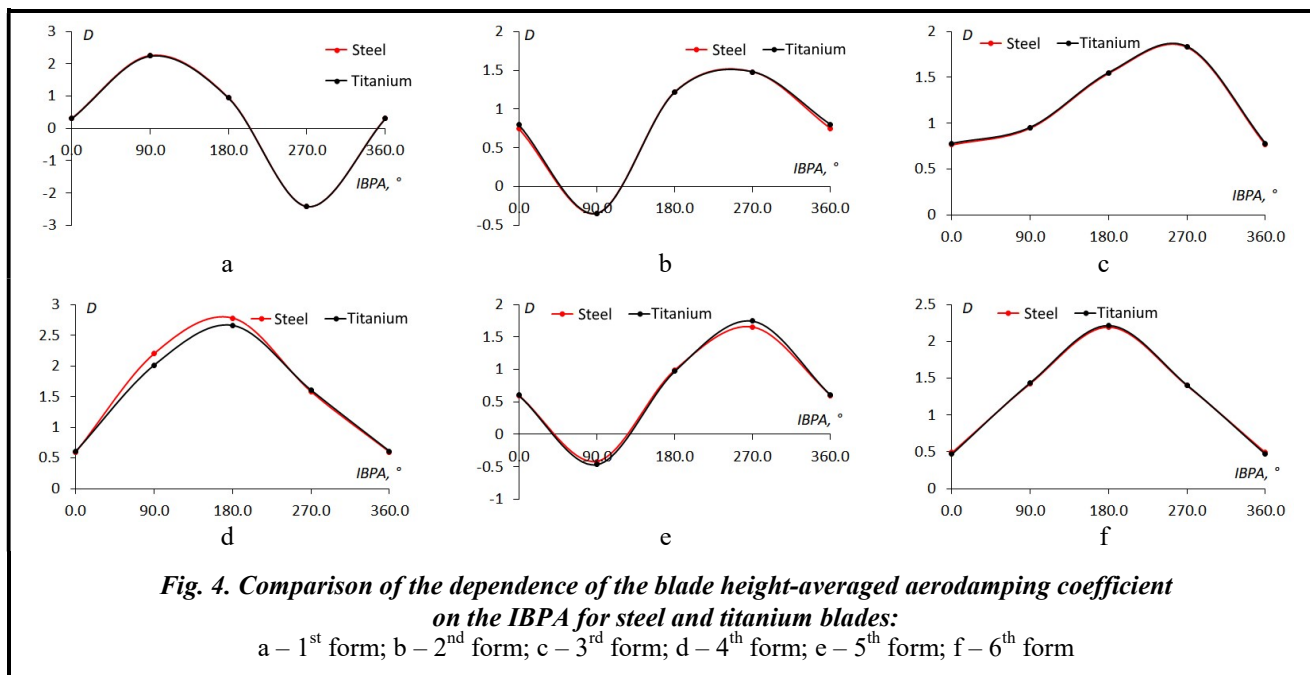

The next task of the study was to simulate the coupled oscillations of the blades of the rotor, which takes into account the influence of aerodynamic forces on oscillations and vice versa. The simulation was carried out for a period of 0.4 s, which corresponds to 10 rotor revolutions, with the amplitudes and inter-blade phase angle set at the start, for a titanium blade. To demonstrate the results, three modes were chosen: for the first natural frequency and angles of 90° and 270° (at these angles, the maximum and minimum values of the aero-damping coefficient are observed), and for the second natural frequency and angle of 90°, at which there is a potential probability of self-excited oscillations.

Fig. 5 shows the motion of the blade's peripheral section oscillating according to the first shape and phase angle of 270° and its spectra, and Fig. 6 shows the aerodynamic forces acting on the blade's peripheral section.

The graphs clearly show an increase in the amplitude of blade oscillations and aerodynamic forces; the first natural frequency dominates the oscillation spectrum, and the first natural frequency and its harmonics dominate the spectrum of forces.


Fig. 7 shows the motion of the peripheral section of the blade oscillating according to the first form and phase angle of 90°, and its spectra, Fig. 8 – the aerodynamic forces acting on the blade's peripheral section during motion.

In this mode, the amplitude of blade oscillations and aerodynamic forces are damped, the first natural frequency dominates the oscillation spectrum, the first natural frequency and its harmonics dominate the force spectrum, and the second natural frequency is also present.


Fig. 9 shows the motion of the peripheral section of the blade oscillating according to the second form and phase angle of 90°, and its spectra, Fig. 10 – the aerodynamic forces acting on the blade's peripheral section.

This mode is characterized by the presence of blade oscillations of constant amplitude; the spectra are dominated by the second natural frequency, but the influence of the first natural frequency and their harmonics is also visible.




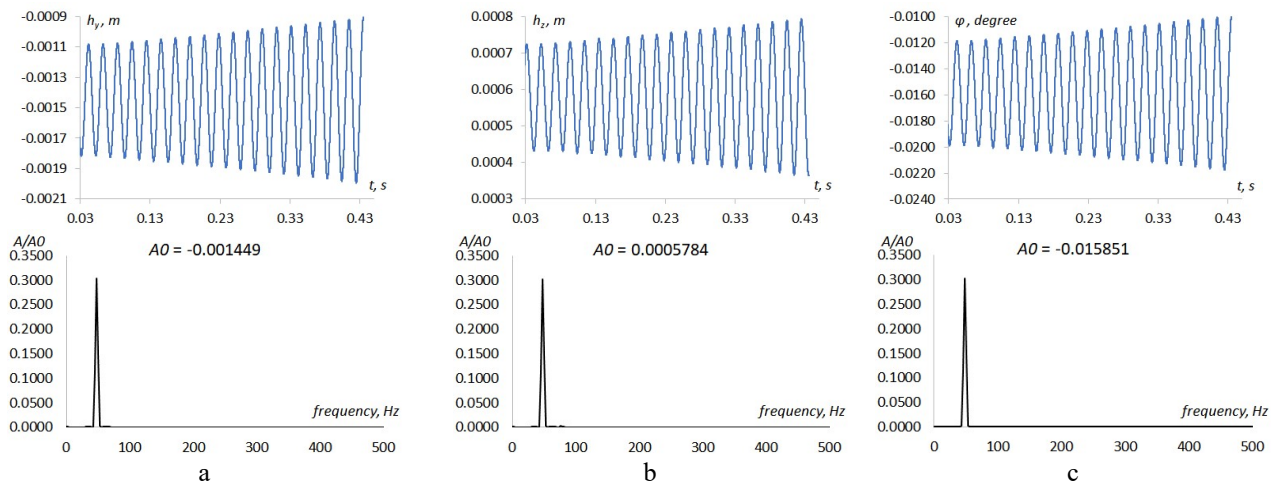


**Fig. 5. Displacement of the peripheral section of the blade in time and its spectra (1<sup>st</sup> form, IBPA=270°):**  
 a – in the circumferential direction; b – in the axial direction; c – rotation relative to the center of gravity

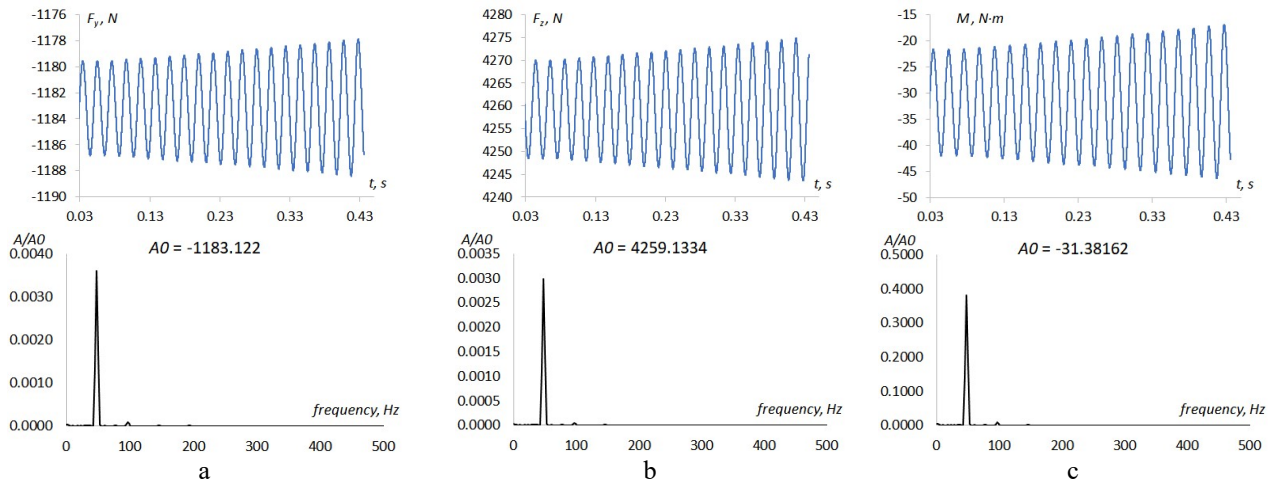


**Fig. 6. Forces acting on the peripheral section of the blade in time and its spectra (1<sup>st</sup> form, IBPA=270°):**  
 a – in the circumferential direction; b – in the axial direction; c – moment relative to the center of gravity

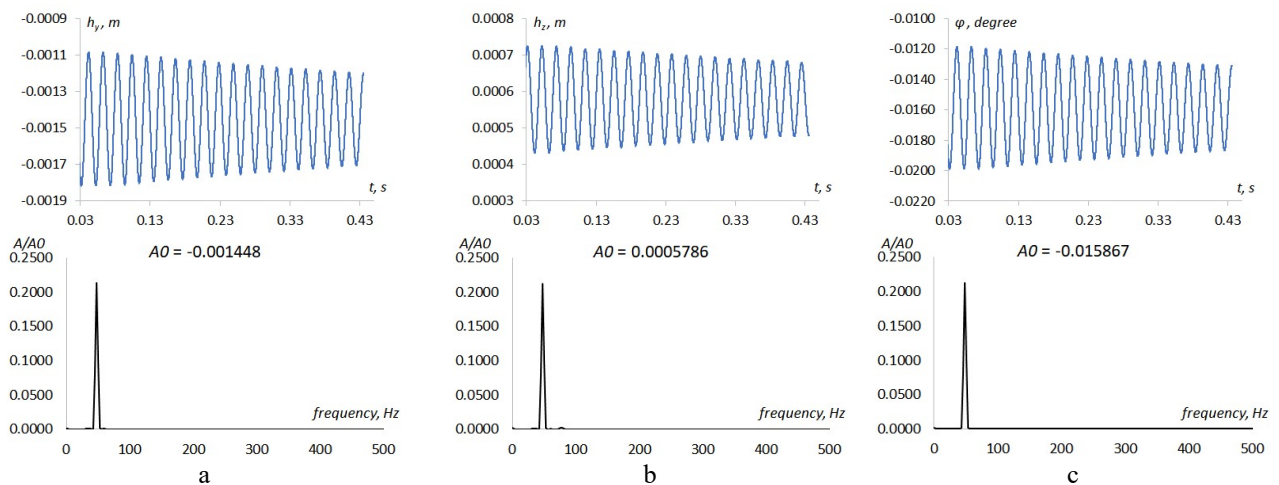


**Fig. 7. Displacement of the peripheral section of the blade in time and its spectra (1<sup>st</sup> form, IBPA=90°):**  
 a – in the circumferential direction; b – in the axial direction; c – rotation relative to the center of gravity

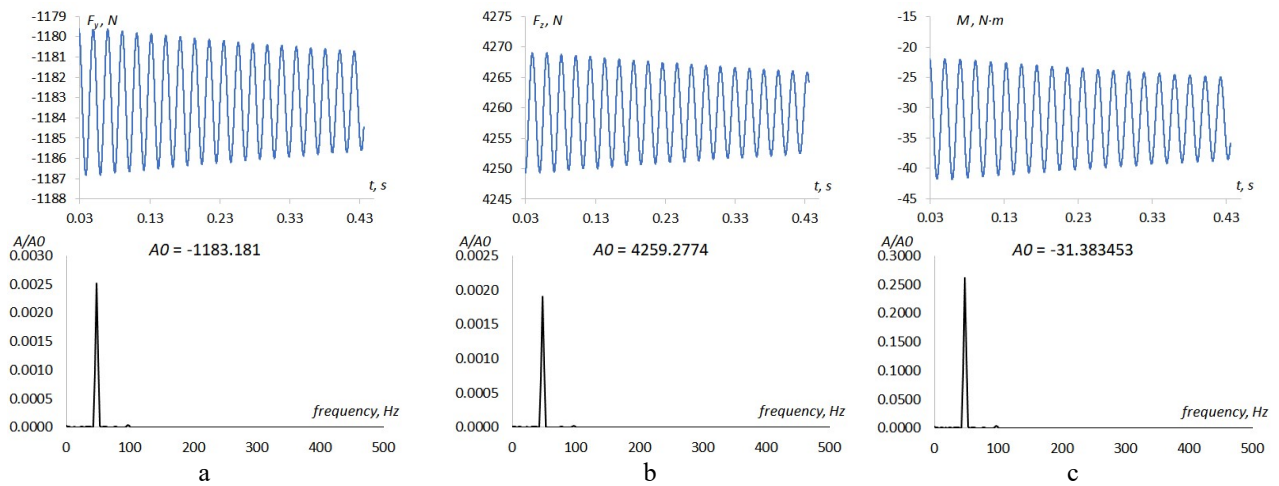

**Fig. 8. Forces acting on the peripheral section of the blade in time and its spectra (1<sup>st</sup> form, IBPA=90°):**  
 a – in the circumferential direction; b – in the axial direction; c – moment relative to the center of gravity

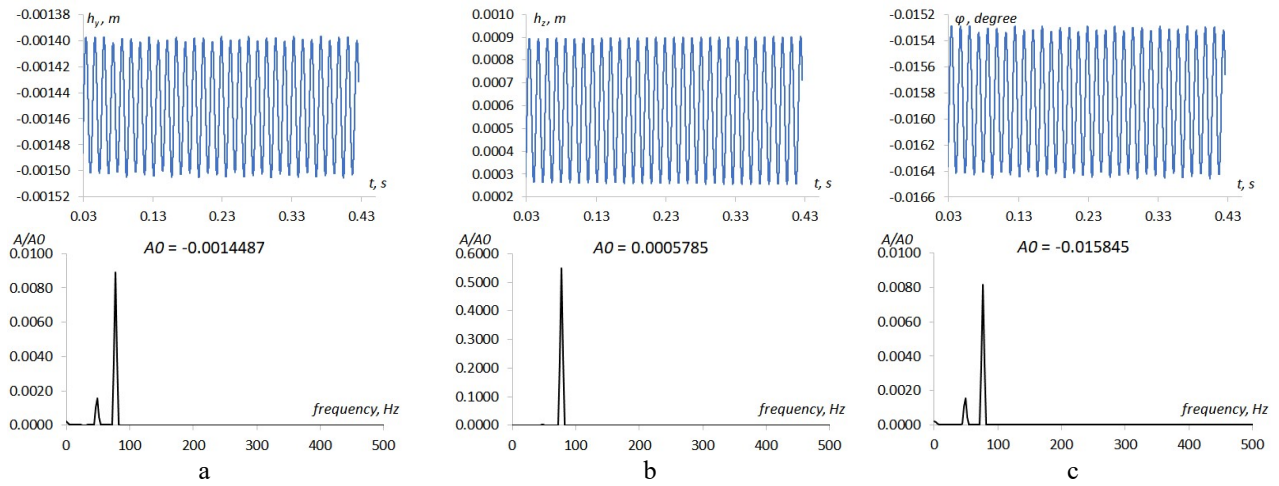

**Fig. 9. Displacement of the peripheral section of the blade in time and its spectra (2<sup>nd</sup> form, IBPA=90°):**  
 a – in the circumferential direction; b – in the axial direction; c – rotation relative to the center of gravity

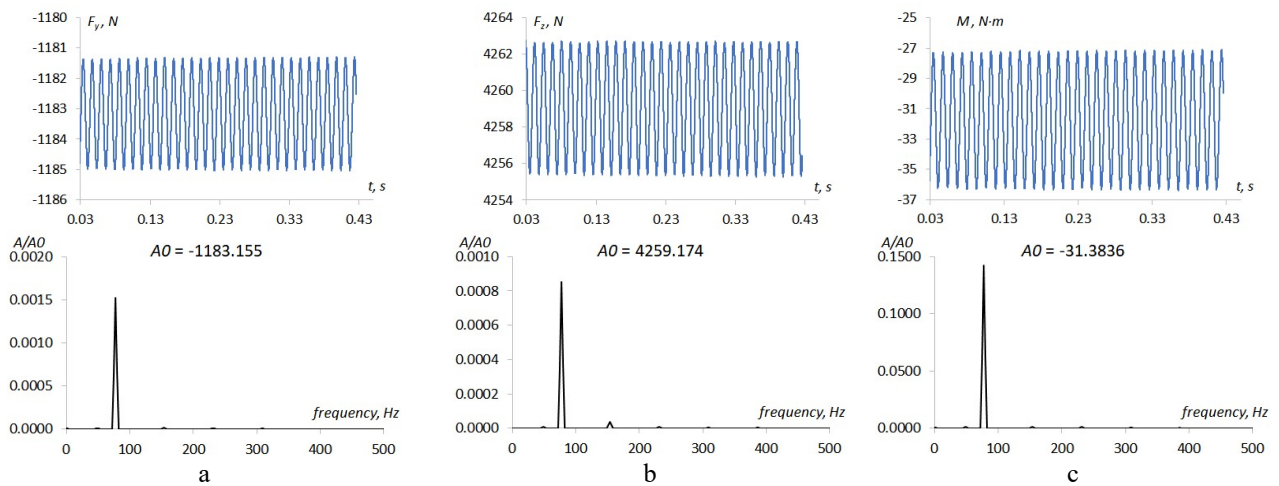

**Fig. 10. Forces acting on the peripheral section of the blade in time and its spectra (2<sup>nd</sup> form, IBPA=90°):**  
 a – in the circumferential direction; b – in the axial direction; c – moment relative to the center of gravity

Thus, for almost all modes of rotor blade oscillations, aerodynamic damping of oscillations was detected, except for the first natural frequency and phase angle of  $270^\circ$ , where an increase in the amplitude of oscillations is observed, and the second natural frequency and phase angle of  $90^\circ$ , where self-oscillations with a constant amplitude are observed. These modes are potentially dangerous during turbine operation, so additional measures should be taken to reduce the oscillations. The measures may include the installation of bandages, tuning of blade natural frequencies, change of blade material, etc.

### Conclusions

A numerical study of the influence of blade material on the aeroelastic characteristics of the advanced rotor of the last stage of a powerful 1000 MW steam turbine was carried out. Previous studies for the blades of this turbine made of steel did not reveal the threat of blade flutter. The analysis used a numerical method based on the simultaneous modeling of viscous flow in the turbomachinery cascades and modeling blade vibrations with modal method. The numerical study was performed using the ANSYS Fluent software package. The modeling was performed for the given and coupled oscillations of the blades in a viscous steam flow. The results of the calculations confirmed the damping of blade vibrations in most modes, except for vibrations with the first form and phase angle of  $270^\circ$  and the second form and phase angle of  $90^\circ$ . Comparison of the results for blades made of steel and titanium alloy did not reveal any significant differences that could affect the conditions for the occurrence of self-excited vibrations. To eliminate the modes identified in the analysis, which can excite blade oscillations, it is necessary to improve the blade design, select a different blade material, or adjust the turbine operation mode.

### Funding

The work was carried out within the project "Improvement and development of the main equipment of NPP turbine units, including the use of small modular reactors and energy storage technologies, in order to ensure energy security and sustainable development of the Ukrainian economy in the war and post-war periods" of the budget program "Scientific and scientific-technical (experimental) works on the priority area 'Technologies of heat, electric and nuclear energy for ensuring energy security of Ukraine' for 2023-2024", program expenditure classification code (KPKVK) 6541230 (applied research).

### References

1. Rzadkowski, R., Surwilo, J., Kubitz, L., & Szymaniak, M. (2018). Unsteady forces in LP last stage 380 MW steam turbine rotating and non-vibrating rotor blades with exhaust hood. *Journal of Vibration Engineering & Technologies*, vol. 6, no. 5, pp. 357–368. <https://doi.org/10.1007/s42417-018-0055-y>.
2. Petrie-Repar, P., Fuhrer, C., Grübel, M., & Vogt, D. (2015). Two-dimensional steam turbine flutter test case. ISUAAAT2014. The 14th International Symposium on Unsteady Aerodynamics, Aeroacoustics and Aeroelasticity of Turbomachines, September 8–11, 2015, Stockholm, Sweden. New York: Curran Associates, Inc., pp. 33–43.
3. Drewczyński, M., Rzadkowski, R., Maurin, A., Marszałek, P. (2015). Free vibration of a mistuned steam turbine last stage bladed disc. Proceedings of ASME TURBO EXPO 2015, June 15–19, 2015, Montreal, Canada. New York: ASME, article no. GT 2015-26011. <https://doi.org/10.1115/GT2015-42080>.
4. Sun, T., Petrie-Repar, P., Vogt, D. M., & Hou, A. (2019). Detached-eddy simulation applied to aeroelastic stability analysis in a last-stage steam turbine blade. *ASME. Journal of Turbomachinery*, vol. 141, iss. 9, article no. 091002. <https://doi.org/10.1115/1.4043407>.
5. Sabale, A. K. & Gopal, N. K. V. (2019). Nonlinear aeroelastic analysis of large wind turbines under turbulent wind conditions. *AIAA Journal*, vol. 57, no. 10, pp. 4416–4432. <https://doi.org/10.2514/1.J057404>.
6. Vahdati, M., Simpson, G., & Imregun, M. (2011). Mechanisms for wide-chord fan blade flutter. *ASME. Journal of Turbomachinery*, vol. 133, iss. 4, article no. 041029. <https://doi.org/10.1115/1.4001233>.
7. Romera, D. & Corral, R. (2021). Nonlinear stability analysis of a generic fan with distorted inflow using passage-spectral method. *ASME. Journal of Turbomachinery*, vol. 143, iss. 6, article no. 061001. <https://doi.org/10.1115/1.4050144>.
8. Stapelfeldt, S. & Vahdati, M. (2019). Improving the flutter margin of an unstable fan blade. *ASME. Journal of Turbomachinery*, vol. 141, iss. 7, article no. 071006. <https://doi.org/10.1115/1.4042645>.
9. Dong, X., Zhang, Y., Zhang, Z., & Lu, X. (2020). Effect of tip clearance on the aeroelastic stability of a wide-chord fan rotor. *ASME. Journal of Engineering for Gas Turbines and Power*, vol. 142, iss. 9, article no. 091010. <https://doi.org/10.1115/1.4048020>.
10. Vahdati, M. & Cumpsty, N. (2018). Aeroelastic instability in transonic fans. *ASME. Journal of Engineering for Gas Turbines and Power*, vol. 138, iss. 2, article no. 022604. <https://doi.org/10.1115/1.4031225>.

11. Hanschke, B., Kühhorn, A., Schrape, S., Giersch, T. (2019). Consequences of borescope blending repairs on modern high-pressure compressor blisk aeroelasticity. *ASME. Journal of Turbomachinery*, vol. 141, iss. 2, article no. 021002. <https://doi.org/10.1115/1.4041672>.
12. Besem, F. M. & Kielb, R. E. (2017). Influence of the tip clearance on a compressor blade aerodynamic damping. *Journal of Propulsion and Power*, vol. 33, no. 1, pp. 227–233. <https://doi.org/10.2514/1.B36121>.
13. Gan, J., Im, H., & Zha, G. (2017). Stall flutter simulation of a transonic axial compressor stage using a fully coupled fluid-structure interaction. 55th AIAA Aerospace Sciences Meeting, January 9–13, 2017, Grapevine, Texas, USA, article no. AIAA 2017-0783. <https://doi.org/10.2514/6.2017-0783>.
14. Vallon, A., Herran, M., Ficat-Andrieu, V., & Detandt, Y. (2018). Numerical investigations of flutter phenomenon in compressor stages of helicopter engines. 2018 AIAA/CEAS Aeroacoustics Conference, June 25–29, 2018, Atlanta, Georgia, USA, article no. AIAA 2018-4091. <https://doi.org/10.2514/6.2018-4091>.
15. Corral, R., Greco, M., & Vega, A. (2019). Tip-shroud labyrinth seal effect on the flutter stability of turbine rotor blades. *ASME. Journal of Turbomachinery*, vol. 141, iss. 10, article no. 101006. <https://doi.org/10.1115/1.4043962>.
16. Huang, H., Liu, W., Petrie-Repar, P., Wang, D. (2021). An efficient aeroelastic eigenvalue method for analyzing coupled-mode flutter in turbomachinery. *ASME. Journal of Turbomachinery*, vol. 143, iss. 2, article no. 021010. <https://doi.org/10.1115/1.4048294>.
17. Ojha, V., Fidkowski, K. J., Cesnik, C. E. S. (2021). Adaptive high-order fluid-structure interaction simulations with reduced mesh-motion errors. *AIAA Journal*, vol. 59, no. 6, pp. 2084–2101. <https://doi.org/10.2514/1.J059730>.
18. Rzadkowski, R., Gnesin, V., Kolodyazhnaya, L., & Szczepanik, R. (2019). Unsteady rotor blade forces of 3D transonic flow through steam turbine last stage and exhaust hood with vibrating blades. In: Mathew J., Lim C., Ma L., Sands D., Cholette M., Borghesani P. (eds) *Asset Intelligence through Integration and Interoperability and Contemporary Vibration Engineering Technologies. Lecture Notes in Mechanical Engineering*. Cham: Springer, pp. 523–531. [https://doi.org/10.1007/978-3-319-95711-1\\_52](https://doi.org/10.1007/978-3-319-95711-1_52).
19. Rzadkowski, R., Gnesin, V., & Kolodyazhnaya, L. (2018). Aeroelasticity analysis of unsteady rotor blade forces and displacements in LP last stage steam turbine with various pressure distributions the stage exit. *Journal of Vibration Engineering & Technologies*, vol. 6, no. 5, pp. 333–337. <https://doi.org/10.1007/s42417-018-0049-9>.
20. Rzadkowski, R., Gnesin, V., Kolodyazhnaya, L., & Kubitz, L. (2018). Aeroelastic behaviour of a 3.5 stage aircraft compressor rotor blades following a bird strike. *Journal of Vibration Engineering & Technologies*, vol. 6, pp. 281–287. <https://doi.org/10.1007/s42417-018-0044-1>.
21. Rzadkowski, R., Kubitz, L., Gnesin, V., & Kolodyazhnaya, L. (2018). Flutter of long blades in a steam turbine. *Journal of Vibration Engineering & Technologies*, vol. 6, iss. 4, pp. 289–296. <https://doi.org/10.1007/s42417-018-0040-5>.
22. Donchenko, V. V., Hnesin, V. I., Kolodiazhna, L. V., Kravchenko, I. F., & Petrov, O. V. (2020). *Prohnozuvannia flatera lopatkovoho vintsia ventyliatora aviatsiinoho dvyhuna* [The prognose of aviation engine fan blade row flutter]. *Visnyk Natsionalnoho tekhnichnoho universytetu «KhPI». Serii: Enerhetychni ta teplotekhnichni protsesy y ustatkuvannia – NTU "KhPI" Bulletin: Power and heat engineering processes and equipment*, no. 2 (4), pp. 11–17 (in Ukrainian). <https://doi.org/10.20998/2078-774X.2020.02.02>.
23. (2019). *ANSYS Fluent Theory Guide*. Canonsburg, PA: ANSYS, Inc., 988 p.
24. Rusanov, A. V., Shvetsov, V. L., Alyokhina, S.V., Pashchenko, N. V., Rusanov, R. A., Ishchenko, M. H., Slaston, L. O., & Sherfedinov, R. B. (2020). The efficiency increase of the steam turbine low pressure cylinder last stage by the blades spatial profiling. *Journal of Mechanical Engineering – Problemy Mashynobuduvannia*, vol. 23, no. 1, pp. 6–14. <https://doi.org/10.15407/pmach2020.01.006>.
25. Kolodiazhna, L. V. & Bykov, Yu. A. (2023). Aeroelastic characteristics of rotor blades of last stage of a powerful steam turbine. *Journal of Mechanical Engineering – Problemy Mashynobuduvannia*, vol. 26, no. 1, pp. 6–14. <https://doi.org/10.15407/pmach2023.01.006>.
26. Gnesin, V. I., Kolodiazhnaya, L. V., Rzadkowski, R. (2018). Aeroelastic behaviour of turbine blade row in 3D viscous flow. *Journal of Mechanical Engineering – Problemy Mashynobuduvannia*, vol. 21, no. 1, pp. 19–30. <https://doi.org/10.15407/pmach2018.01.019>.

Received 16 July 2024



## Вплив матеріалу лопаток ротора парової турбіни на аеропружні характеристики

Ю. А. Биков, Л. В. Колодяжна

Інститут енергетичних машин і систем ім. А. М. Підгорного НАН України,  
61046, Україна, м. Харків, вул. Комунальників, 2/10

Елементи потужних парових турбін, зокрема, лопатки ротора останніх ступенів, зазнають значних нестационарних навантажень, які в деяких випадках можуть викликати вкрай небезпечні самозбудні коливання, що негативно впливають на ефективність і ресурс лопаткового апарату. З огляду на це при розробці нових чи модернізації існуючих ступенів парових турбін рекомендовано досліджувати аеропружні характеристики робочих лопаток. На умови виникнення самозбудних коливань впливають як геометричні характеристики, так і сплав, з якого виготовлено лопатку. Для визначення впливу матеріалу лопаток на аеропружну поведінку було проведено числовий аналіз аеропружних характеристик робочих лопаток останнього ступеня, виготовлених із сталевого й титанового сплаву. Для аналізу використано метод одночасного моделювання нестационарної течії газу через лопаткові вінці й пружних коливань лопаток (зв'язана задача), який дозволяє отримати амплітудно-частотний спектр взаємодії нестационарних навантажень і коливань лопаток. У роботі представлено результати числового аналізу для гармонійних коливань із заданими амплітудою й міжлопатковим фазовим кутом, а також для режиму зв'язаних коливань лопаток під дією нестационарних аеродинамічних сил. Наведено залежності коефіцієнта аеродемпфування від міжлопаткового фазового кута і розподіл коефіцієнта вздовж лопатки. Результати моделювання зв'язаних коливань лопаток для шести перших власних форм представлено у вигляді зміни за часом переміщення периферійного перетину лопатки, а також сил і моментів, що діють на периферійний перетин. Наведено відповідні амплітудно-частотні спектри переміщень і навантажень у периферійному перетині. Аналіз результатів показав несуттєву відмінність характеристик від запропонованих матеріалів лопатки. Для першої власної форми коливань лопатки виявлена можливість виникнення самозбудних коливань, для другої форми є умови для появи стійких автоколивань.

**Ключові слова:** аеропружність, флатер, парова турбіна, модальний метод, числова аеродинаміка, взаємодія рідини зі структурою.

## Література

1. Rzakowski R., Surwilo J., Kubitz L., Szymaniak M. Unsteady forces in LP last stage 380 MW steam turbine rotating and non-vibrating rotor blades with exhaust hood. *Journal of Vibration Engineering & Technologies*. 2018. Vol. 6. No. 5. P. 357–368. <https://doi.org/10.1007/s42417-018-0055-y>.
2. Petrie-Repar P., Fuhrer C., Grübel M., Vogt D. Two-dimensional steam turbine flutter test case. ISUAAAT2014. The 14th International Symposium on Unsteady Aerodynamics, Aeroacoustics and Aeroelasticity of Turbomachines, September 8–11, 2015, Stockholm, Sweden. New York: Curran Associates, Inc. 2015. P. 33–43.
3. Drewczyński M., Rzakowski R., Maurin A., Marszałek P. Free vibration of a mistuned steam turbine last stage bladed disc. Proceedings of ASME TURBO EXPO 2015, June 15–19, 2015, Montreal, Canada. New York: ASME. 2015. Article no. GT 2015-26011. <https://doi.org/10.1115/GT2015-42080>.
4. Sun T., Petrie-Repar P., Vogt D. M., Hou A. Detached-eddy simulation applied to aeroelastic stability analysis in a last-stage steam turbine blade. *ASME. Journal of Turbomachinery*. 2019. Vol. 141. Iss. 9. Article no. 091002. <https://doi.org/10.1115/1.4043407>.
5. Sabale A. K., Gopal N. K. V. Nonlinear aeroelastic analysis of large wind turbines under turbulent wind conditions. *AIAA Journal*. 2019. Vol. 57. No. 10. P. 4416–4432. <https://doi.org/10.2514/1.J057404>.
6. Vahdati M., Simpson G., Imregun M. Mechanisms for wide-chord fan blade flutter. *ASME. Journal of Turbomachinery*. 2011. Vol. 133. Iss. 4. Article no. 041029. <https://doi.org/10.1115/1.4001233>.
7. Romera D., Corral R. Nonlinear stability analysis of a generic fan with distorted inflow using passage-spectral method. *ASME. Journal of Turbomachinery*. 2021. Vol. 143. Iss. 6. Article no. 061001. <https://doi.org/10.1115/1.4050144>.
8. Stapelfeldt S., Vahdati M. Improving the flutter margin of an unstable fan blade. *ASME. Journal of Turbomachinery*. 2019. Vol. 141. Iss. 7. Article no. 071006. <https://doi.org/10.1115/1.4042645>.
9. Dong X., Zhang Y., Zhang Z., Lu X. Effect of tip clearance on the aeroelastic stability of a wide-chord fan rotor. *ASME. Journal of Engineering for Gas Turbines and Power*. 2020. Vol. 142. Iss. 9. Article no. 091010. <https://doi.org/10.1115/1.4048020>.
10. Vahdati M., Cumpsty N. Aeroelastic instability in transonic fans. *ASME. Journal of Engineering for Gas Turbines and Power*. 2018. Vol. 138. Iss. 2. Article no. 022604. <https://doi.org/10.1115/1.4031225>.

11. Hanschke B., Kühhorn A., Schrape S., Giersch T. Consequences of borescope blending repairs on modern high-pressure compressor blisk aeroelasticity. *ASME. Journal of Turbomachinery*. 2019. Vol. 141. Iss. 2. Article no. 021002. <https://doi.org/10.1115/1.4041672>.
12. Besem F. M., Kielb R. E. Influence of the tip clearance on a compressor blade aerodynamic damping. *Journal of Propulsion and Power*. 2017. Vol. 33. No. 1. P. 227–233. <https://doi.org/10.2514/1.B36121>.
13. Gan J., Im H., Zha G. Stall flutter simulation of a transonic axial compressor stage using a fully coupled fluid-structure interaction. 55th AIAA Aerospace Sciences Meeting, January 9–13, 2017, Grapevine, Texas, USA. Article no. AIAA 2017-0783. <https://doi.org/10.2514/6.2017-0783>.
14. Vallon A., Herran M., Ficat-Andrieu V., Detandt Y. Numerical investigations of flutter phenomenon in compressor stages of helicopter engines. 2018 AIAA/CEAS Aeroacoustics Conference, June 25–29, 2018, Atlanta, Georgia, USA. Article no. AIAA 2018-4091. <https://doi.org/10.2514/6.2018-4091>.
15. Corral R., Greco M., Vega A. Tip-shroud labyrinth seal effect on the flutter stability of turbine rotor blades. *ASME. Journal of Turbomachinery*. 2019. Vol. 141. Iss. 10. Article no. 101006. <https://doi.org/10.1115/1.4043962>.
16. Huang H., Liu W., Petric-Repar P., Wang D. An efficient aeroelastic eigenvalue method for analyzing coupled-mode flutter in turbomachinery. *ASME. Journal of Turbomachinery*. 2021. Vol. 143. Iss. 2. Article no. 021010. <https://doi.org/10.1115/1.4048294>.
17. Ojha V., Fidkowski K. J., Cesnik C. E. S. Adaptive high-order fluid-structure interaction simulations with reduced mesh-motion errors. *AIAA Journal*. 2021. Vol. 59. No. 6. P. 2084–2101. <https://doi.org/10.2514/1.J059730>.
18. Rzadkowski R., Gnesin V., Kolodyazhnaya L., Szczepanik R. Unsteady rotor blade forces of 3D transonic flow through steam turbine last stage and exhaust hood with vibrating blades. In: Mathew J., Lim C., Ma L., Sands D., Cholette M., Borghesani P. (eds) *Asset Intelligence through Integration and Interoperability and Contemporary Vibration Engineering Technologies. Lecture Notes in Mechanical Engineering*. Cham: Springer, 2019. P. 523–531. [https://doi.org/10.1007/978-3-319-95711-1\\_52](https://doi.org/10.1007/978-3-319-95711-1_52).
19. Rzadkowski R., Gnesin V., Kolodyazhnaya L. Aeroelasticity analysis of unsteady rotor blade forces and displacements in LP last stage steam turbine with various pressure distributions the stage exit. *Journal of Vibration Engineering & Technologies*. 2018. Vol. 6. No. 5. P. 333–337. <https://doi.org/10.1007/s42417-018-0049-9>.
20. Rzadkowski R., Gnesin V., Kolodyazhnaya L., Kubitz L. Aeroelastic behaviour of a 3.5 stage aircraft compressor rotor blades following a bird strike. *Journal of Vibration Engineering & Technologies*. 2018. Vol. 6. P. 281–287. <https://doi.org/10.1007/s42417-018-0044-1>.
21. Rzadkowski R., Kubitz L., Gnesin V., Kolodyazhnaya L. Flutter of long blades in a steam turbine. *Journal of Vibration Engineering & Technologies*. 2018. Vol. 6. Iss. 4. P. 289–296. <https://doi.org/10.1007/s42417-018-0040-5>.
22. Донченко В. В., Гнесін В. І., Колодяжна Л. В., Кравченко І. Ф., Петров О. В. Прогнозування флатера лопаткового вінця вентилятора авіаційного двигуна. Вісник Національного технічного університету «ХПІ». Серія: Енергетичні та теплотехнічні процеси й устаткування. 2020. № 2 (4). С. 11–17. <https://doi.org/10.20998/2078-774X.2020.02.02>.
23. ANSYS Fluent Theory Guide. Canonsburg, PA: ANSYS, Inc., 2019. 988 p.
24. Rusanov A. V., Shvetsov V. L., Alyokhina S.V., Pashchenko N. V., Rusanov R. A., Ishchenko M. H., Slaston L. O., Sherfedinov R. B. The efficiency increase of the steam turbine low pressure cylinder last stage by the blades spatial profiling. *Journal of Mechanical Engineering – Problemy Mashynobuduvannia*. 2020. Vol. 23. No. 1. P. 6–14. <https://doi.org/10.15407/pmach2020.01.006>.
25. Kolodiazhna L. V., Bykov Yu. A. Aeroelastic characteristics of rotor blades of last stage of a powerful steam turbine. *Journal of Mechanical Engineering – Problemy Mashynobuduvannia*. 2023. Vol. 26. No. 1. P. 6–14. <https://doi.org/10.15407/pmach2023.01.006>.
26. Gnesin V. I., Kolodiazhna L. V., Rzadkowski R. Aeroelastic behaviour of turbine blade row in 3D viscous flow. *Journal of Mechanical Engineering – Problemy Mashynobuduvannia*. 2018. Vol. 21. No. 1. P. 19–30. <https://doi.org/10.15407/pmach2018.01.019>.