

INFLUENCE OF HYDROGEN IMPLANTATION AND OXIDATION ON AIR ON THE STRUCTURE AND MECHANICAL PROPERTIES OF NICKEL BASED COATING PG-19-01

Kairat K. Kadyrzhanov*, **Sergei B. Kislitsin***, **Fadey F. Komarov****,
Aleksander D. Pogrebnyak***, **Vjacheclav S. Rusakov******, **Yuriy Zh. Tuleushev***

**Institute of Nuclear Physics of National Nuclear Center of Republic of Kazakhstan (Almat),
Kazakhstan*

***Byelorussia State University (Minsk)
Byelorussia*

****Sumy Institute for Surface Modification
Ukraine*

*****Moscow State University
Russia*

Influence of oxidation on air and hydrogen implantation on the structure and mechanical properties of nickel based coating PG-19N-01 deposited on iron and stainless steel C0.12Cr18Ni10Ti substrate and also of iron with plasma treatment of surface were studied. It is shown, that implantation by protons with energy from 0.6 to 1.6 MeV up to doze $3 \cdot 10^{18}$ proton/cm² lead to insignificant changes of structure and strength properties of PG-19N-01 coating. In the samples oxidized on air at temperatures 500 °C, 700 °C and 900 °C during three hours increase in microhardness and strength of the material at mechanical tests on static bend is observed.

INTRODUCTION

Actual way of improvement of physical and mechanical properties of metal materials is the treatment of its surface by laser, electron and ion beam or by deposition on its surface of protective coating. In such way, it is possible to increase such properties of materials as hardness, wear resistance, corrosion resistance, etc. By present time various ways of protective coating deposition on the material surface – electrochemical, magnetron, detonation are developed [1, 2]. The detonation method is widely used, rather simple and inexpensive. As lack of this method it is possible to note necessity of preliminary preparation of deposited material i.e. preparation of powders of the necessary composition. Furthermore, quality and homogeneity of coatings depends on the sizes of the powder fractions and on conditions of deposition [3].

The powder nickel base coating PG-19N-01 (Cr – 8 ÷ 4%, B – 2.3%, Si – 1.2 ÷ 3.2%, Fe – 5%, C – 0.5%) is the material with high hardness, heat resistance and is perspective for application in those products where such properties are required [4].

In the given work, results of studying of structure and mechanical properties of iron with PG-19N-01 coating and also influences of oxidation on air and hydrogen implantation on

structure and mechanical properties PG-19N-01 coating are presented.

MATERIALS AND EXPERIMENTAL TECHNIQUE

Substrates for deposition of PG-19N-01 coatings were made from massive bar of α – iron (purity – 99,8) and stainless steel C0.12Cr18Ni10Ti. Samples represented thin plates with sizes 30×30×(0.8 ÷ 1) mm. Plasma treatment of the surface and deposition of protective coating by plasma-detonation method from powder of alloy PG-19N-01 on the base of nickel (Cr – 8 ÷ 4%, B – 2.3%, Si – 1,2 ÷ 3.2%, Fe – 5%, C – 0.5%, Ni – 83 – 87%) are described in detail in [1] and carried out in the Sumy Institute for Surface Modification.

Study of structure and mechanical properties of the material of substrate and coating were carried out by methods of optical metallographic, X-ray diffractometry, measurements of microhardness and mechanical tests on static bend.

Oxidation of samples of iron, steel, iron and steel with PG-19N-01 coating and iron with plasma treatment surface were carried out in muffle furnace at temperatures 500 °C, 700 °C and 900 °C within three hours.

Radiation treatment of samples was carried out by protons with energy from 0.6 to

1.6 MeV up to dose 3×10^{18} proton/cm² on the electrostatic accelerator UKP-2-1 of Institute of Nuclear Physics.

RESULTS AND DISCUSSION

Experimental results of influence of oxidation on air at high temperatures and proton irradiation on structure and mechanical properties of iron with plasma treated surface and iron with the PG-19N-01 coating deposited by plasma-detonation method represented below.

1. *Iron with plasma treated surface.* Structure of initial material (iron), plasma treated iron, plasma treated iron after oxidation at 700 °C and proton irradiation is shown on fig. 1. Characteristic feature of initial iron structure is big mean grain size – 200 μk (fig. 1a). After plasma treatment the mean grain size become much smaller and consist 50 μk (fig. 1b). After oxidation mean grain size practically does not change, but grain boundaries revealed as figures of etching (fig. 1c). Apparently precipitation of some phases on grain boundaries occurred during annealing and their traces after electrolytic etching are observed. After proton irradiation mean grain size become large in comparing with plasma treated surface and consists 100 μk (fig. 1d).

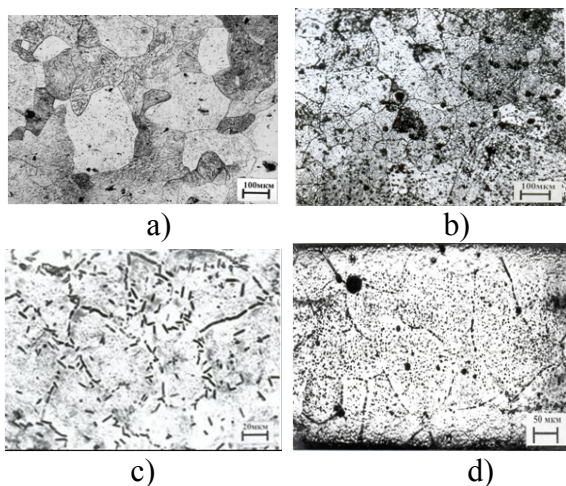


Fig. 1. Microstructure of surface layers of initial iron – a); plasma treated iron – b); plasma treated iron after oxidation at 700 °C – c) and proton irradiation – d).

Microhardness of initial material (iron), plasma treated iron, plasma treated iron after oxidation at 700 °C and proton irradiation is shown on fig. 2. As follows from dependences of H_{μ} on distance for treated surface the microhardness for treated material increases ap-

proximately twice (curve 1) compare to initial material (line “iron”). Oxidation at 700 °C leads to little increasing of microhardness (curve 2) and after proton implantation decreasing of H_{μ} in the region of hydrogen influence (3) is observed.

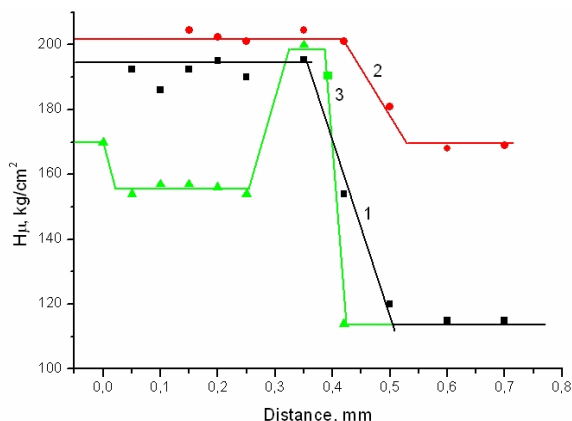


Fig. 2. Microhardness of surface layers of initial iron (iron), plasma treated iron – 1), plasma treated iron after oxidation at 700 °C – 2) and proton irradiation – 3).

Strength of iron with plasma treated surface was determined from mechanical tests on static band, as mechanical properties of surface much more sensitive to band deformation compare to uneasily deformation. From bend test follow – plasma treatment of iron surface lead to strong increasing of iron strengthening – irreversible deformation begins at load 4 kg (maximal strength – 8 kg) while as for untreated material irreversible deformation begins at load ~2 kg (maximal strength – 4.5 kg). Oxidation at 700 °C leads to further increasing of irreversible strength. – 5 kg (maximal strength – 11 kg). Proton irradiation leads to decreasing irreversible strength value up to 2 kg and maximal strength up to 3.9 kg. It is necessary to note following: One more impotent fact: cracks on iron surface does not appear ever for band maximal band angle, while for plasma treated surface cracks forms at band angle ~ 30°, after oxidation at temperature 700 °C – at the same band angle 30°. Cracks on plasma treated surface forms at bend angle ~ 45° for material after proton irradiation.

2. *Iron with the PG-19N-01 coating deposited by plasma-detonation method.* Structure of the PG-19N-01 coating deposited by plasma-detonation method, coating structure after oxidation on air at temperature 700 °C

and proton irradiation is shown on fig. 3. Microstructure of PG-10N-01 coating before oxidation and proton irradiation represent the mixture of white and dark regions – probably fraction of PG -10N-01 powder (fig. 3a). After oxidation on air between deposited material and substrate appear strong boundary (fig. 3b), more over in structure of coating forms pores size of which can reach 100 μm , see fig. 3c. Proton irradiation does not produce significant influence on microstructure of coating and substrate.

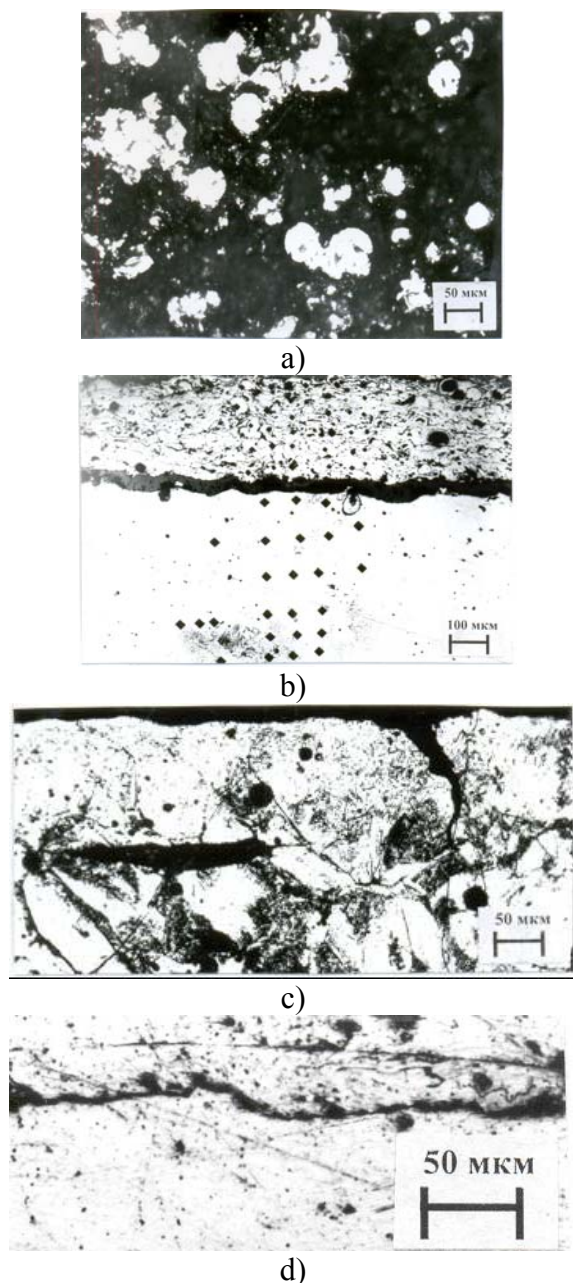


Fig. 3. Microstructure of PG-19N-01 coating deposited by plasma-detonation method. a) – after depositing of coating; microstructure of PG-19N-01 coating iron after oxidation at 700 °C – b); pore in coating iron after oxidation at 700 °C – c); microstructure coating after proton irradiation – d).

Microhardness value in white regions is very high and consist $\sim 715 \text{ kg/mm}^2$. Average microhardness value of coating equal to $\sim 580 \text{ kg/mm}^2$ and more than five times exceeds H_{μ} of the substrate material. After oxidation on air at 700 °C during 3 hours microhardness of coating decrease to value $\sim 310 \text{ kg/mm}^2$. Zone of microhardness decreasing consists $\sim 80 - 100$ microns from the outer surface of coating, H_{μ} of other part of a coating remain the same as before oxidation (580 kg/mm^2). Proton implantation leads to softening of coating on $\sim 28\%$, softened zone extend on 10 – 12 μm and corresponds to projective range of protons. Microhardness value behind projective range corresponds to unirradiated material and consists $\sim 580 \text{ kg/mm}^2$.

As follow from experiments on static band flexural strength of PG-10N-01 coating on iron is insignificant. For bend angle $\sim 10^\circ$ at the surface of coating appear frontal crack and at bend angle $\sim 60^\circ$ delaminating of coating is observed. Irreversible deformation begins at load 2 kg and coincides with crack formation and maximal load consist 3 kg and corresponds to delamination of coating. For oxidized material cracks forms at the same bend angle 10° and at bend angle 45° delamination of coating occur. At that weakening of material take place: cracks forms at bending stress 1.5 kg and delamination – at bending stress – 2 kg. Proton irradiation does not significantly influence on mechanical properties of Ni-base PG-19N-01 coating: cracks forms at bend angle $\sim 10^\circ$ (see fig. 4), delamination of coating occur at bend angle $\sim 60^\circ$, stress level for irreversible deformation and maximal stress is the same order as for unirradiated material.

CONCLUSION

1. Plasma treatment of iron leads to significant improvement of mechanical properties of materials surface and reaches 200 microns from the treated surface. In that region mean grain size decrease, microhardness and strength increase. Maximal increasing of microhardness and strength (~ 2 times) reaches up to 100 microns from treated surface. Together with increasing of bending strength formation of cracks take place at rather small band angle ($\sim 60^\circ$) as follow from bend test. Oxidation on air at high temperatures (500 °C and higher) of iron with plasma treated surface leads to degradation of mechanical properties. Microhardness practically left the same. Net of cracks forms at band angle $\sim 30^\circ$ as follow from bend test. Proton irradiation leads to recovery of mechanical properties: microhard-

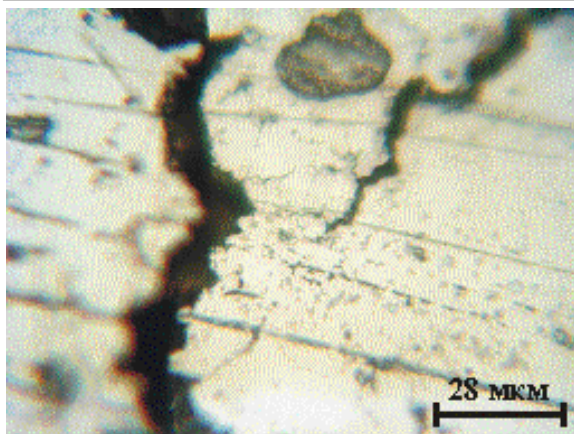


Fig. 4. Crack formation at band angle $\sim 10^\circ$ in PG-19N-01 coating after oxidation at 700 °C.

ness decrease, bending strength decrease to the level of initial material.

2. Deposition of Ni-base PG19N-01 coating by plasma-detonation method allow significantly improve physical and mechanical properties of material, for example iron. PG-19N-01 coating has rather low corrosion resistance, but PG-19N-01 coating significantly increase hardness, strength, wear resistance. Bending strength of that coating the same order as for initial material and at band angle $\sim 60^\circ$ delaminating of coating take place. Oxidation on air at high temperatures (500 °C and higher) of iron with Ni-base PG-19N-01 coating leads to

ВПЛИВ ІМПЛАНТАЦІЇ ВОДНЮ ТА ОКИСЛЮВАННЯ НА ПОВІТРІ НА СТРУКТУРУ І МЕХАНІЧНІ ВЛАСТИВОСТІ ПОКРИТТІВ НА ОСНОВІ НІКЕЛЮ PG-19-01

К.К. Кадиржанов, С.В. Кислицін,
Ф.Ф. Комаров, А.Д. Погребняк,
В.С. Русаков, В.Ж. Тулешев

Вивчено вплив окислювання на повітрі й імплантації водню на структуру й механічні властивості нікелевих покриттів PG-19N-01, нанесених на залізу підкладку та з нержавіючої сталі 30.12Cr18Ni10Ti підкладки, а також заліза із плазмовою обробкою поверхні. Показано, що імплантація протонами з енергією від 0,6 до 1,6 МеВ з дозою $3 \cdot 10^{18}$ протон/см² приводить до незначних змін структури й міцності характеристик покриття PG-19N-01. У зразках, окислених на повітрі при температурах 500 °C, 700 °C і 900 °C у плинні 3-х годин спостерігалось збільшення мікротвердості й зміцнення матеріалу при механічних випробуваннях на статичний вигин.

degradation of mechanical properties of coating. Microhardness decreases almost twice, bending strength decrease. At band angle $\sim 10^\circ$ on the surface forms cracks and at band angle $\sim 45^\circ$ delaminating of coating take place. Proton irradiation does not significantly influence on structure and mechanical properties of Ni-base PG-19N-01 coating.

ACKNOWLEDGMENTS

The work has been performed at partial support of ISTC, Project K-1198 "Characterization and Testing of Coated Nickel- and Iron-Based Superalloys for Application in High-Temperature Power Installations"

REFERENCES

1. Kadyrzhanov K.K., Komarov F.F., Pogrebnyak A.D., Rusakov V.S., Turkebaev T.E. Ion-beam and ion plasma modification of materials. – M.: Moskoov State University, 2005. – 640 p. (In Russian)
2. Thorpe M.L., Richter H.J. Thermal Spray// International adv. in Coatings technologies (Orlando). – 1992. – P. 137.
3. Turin Yu.N., Pogrebnyak A.D.//Surf. and Coating Tech. – 1999. – Vol. 111. – P. 269-278.
4. Klimenov V.A., Panin V.E., Bezborodov V.P. //J. Fiz. Chem. Obr. Met. – 1997. – Vol. 221, No. 5. – P. 68-75 (in Russian).

ВЛИЯНИЕ ИМПЛАНТАЦИИ ВОДОРОДА И ОКИСЛЕНИЯ НА ВОЗДУХЕ НА СТРУКТУРУ И МЕХАНИЧЕСКИЕ СВОЙСТВА ПОКРЫТИЙ НА ОСНОВЕ НИКЕЛЯ PG-19-01

К.К. Кадиржанов, С.В. Кислицын,
Ф.Ф. Комаров, А.Д. Погребняк,
В.С. Русаков, В.Ж. Тулешев

Изучено влияние окисления на воздухе и имплантации водорода на структуру и механические свойства никелевых покрытий PG-19N-01, нанесенных на железную подложку и из нержавеющей стали 30.12Cr18Ni10Ti подложки, а также железа с плазменной обработкой поверхности. Показано, что имплантация протонами с энергией от 0,6 до 1,6 МэВ с дозой $3 \cdot 10^{18}$ протон/см² приводит к незначительным изменениям структуры и прочностных характеристик покрытия PG-19N-01. В образцах, окисленных на воздухе при температурах 500 °C, 700 °C и 900 °C в течении 3-х часов наблюдалось увеличение микротвердости и упрочнения материала при механических испытаниях на статический изгиб.