

Seismic response of a layered soil deposit with inclusions

*O.V. Kendzera, S.V. Mykulyak, Yu.V. Semenova, I.A. Skurativska,
S.I. Skurativskyi, 2021*

S.I. Subbotin Institute of Geophysics of the National Academy of Sciences of Ukraine,
Kyiv, Ukraine

Received 15 February 2021

It is known that soil massifs can amplify or weaken seismic waves generated by earthquakes. Therefore, the problem of studying the impact of soil deposits on the passage of seismic waves is important in terms of the facilities in operation and the design of new earthquake-resistant objects. Soil deposits, which are allotted for building, are mainly layered. In addition, the materials in these layers are also significantly heterogeneous. To describe the dynamics of inhomogeneous soil massif, the model of an elastic continuum with oscillating non-interacting inclusions is used. Within the framework of this model, the resonant properties of multi-layered soil deposit are analyzed at the conditions of harmonic perturbations applied to the bedrock. On the basis of the solution to the boundary value problem concerning oscillations of the system subjected to the free surface and conjugation conditions on the boundaries between layers, it is derived the transfer function which characterizes the amplification of shear displacements by the layered system. Within the framework of problems on the oscillations of two- and five layered systems, the analytical studies were confirmed by numerical evaluations of transfer functions. In particular, using the built-in functions of the system «Mathematica», it is developed the numerical procedure for evaluating the frequency dependencies of amplification factor for layered Kelvin—Voigt media and media with oscillating inclusions. Moreover, for the two-layered system, it is analyzed the effect on the transfer function for the ratio of layers' shear moduli and the ratio of the inclusions' natural frequencies. It is also shown that the maxima in the transfer function correspond to the eigenfrequencies of the boundary value problem. The obtained results and the proposed approach to the study of the response of the layered inhomogeneous medium to vibrational perturbations can serve as a theoretical basis for earthquake-resistant design and construction.

Key words: layered soil deposit, amplitude-frequency characteristics, resonant phenomena, models of heterogeneous media, earthquake resistance, ground seismic response modeling.

Analysis of the destructive effects of past and recent earthquakes [Ishihara, 1996; Adimoolam, Banerjee, 2019] has shown that the pattern of damage during earthquakes is mainly determined by the reaction of local soils to seismic loading. The near-surface layers of soil strata act as a filter that amplifies/weakens the amplitude of seismic waves.

Since the amplification of seismic oscillations by soil deposit can be very significant [Kausel, Roësset, 1984; Pratt et al., 2017; Adimoolam, Banerjee, 2019; Kumar et al., 2020], the analysis of the soil response became one

of the most important tasks of engineering seismology [Gutowski, Dym, 1976]. The soil reaction modeling allows one to determine the dominant frequencies of a local ground site, to estimate the enhancement of seismic oscillations by local soils [With, Bodare, 2007; Hosseini, Pajouh, 2010; Kumar et al., 2020], and to obtain accelerograms and response spectra of soil oscillations on the surface. Information on the probabilistic characteristics of seismic oscillations on the soil surface is required for evaluating the critical dynamic stresses and strains that cause loss of soil

stability and, consequently, the destruction of buildings and structures [Gutowski, Dym, 1976; Takemiya, Yamada, 1981; Mandal et al., 2012] located on such ground.

To assess the seismic ground response of the local area, it is used the well-known [Sarma, 1994; Ishihara, 1996; Kramer, 1996] approach based on the shear waves which propagate vertically upwards from the underlying bedrock through the layers of ground. In engineering practice, as a rule, linear or equivalent linear methods are used with the involvement of SHAKE [Schnabel et al., 1972], EERA [Bardet et al., 2000], Deepsoil [Hashash, 2012], and others. The algorithms [Gutowski, Dym, 1976; Sarma, 1994; Hosseini, Pajouh, 2010] incorporated in these programs are based on the assumption that all boundaries between the layers are horizontal and each layer is homogeneous.

To take into account the structure of natural soils [Kundu et al., 2019; Kumar et al., 2020; Mondal et al., 2020], classical models of continuum mechanics are generalized in two major ways. One approach is based on the modification of medium's equations of state. Starting from the simplest model, i. e. Hook's law, the more advanced models have been developed, namely Maxwell, Kelvin—Voigt, Zener (standard linear solid) models [Kaliski et al., 1992; Ishihara, 1996; Kramer, 1996; Erofeev, 2003], in particular, derived within the framework of internal variables concept [Danylenko et al., 2011], as well as nonlocality ideas [Kaliski et al., 1992; Eringen, 1999; Danylenko et al., 2011; Kendzera et al., 2020a].

Another way to improve the description of soil state is related to the modification of equations of motion by means of introducing the auxiliary equations for the additional degrees of freedom. The bright example of this approach is the Cosserat model where the rotational degrees of freedom are incorporated [Erofeev, 2003; Green, Rivlin, 1964]. In this paper, we use the generalization of classical Lamé equations [Slepjan, 1967; Palmov, 1969; Mishuris et al., 2019] taking into account the oscillating degrees of freedom. To do this, two continua are considered. The carrying medium is classical, while the other consists

of a set of partial oscillators representing the medium's inclusions. Such models and their applications for the investigation of wave dynamics were studied in the papers [Danilenko, Skurativskyy, 2008; Danylenko, Skurativskiy, 2012, 2016, 2017].

The aim of the present studies is to evaluate the resonant properties of multilayer soil systems using a generalized model with oscillating inclusions.

Analytical estimation of soil response to the harmonic disturbances. The assessment for seismic response of heterogeneous soil deposit (single layer) on the basis of the model of mutually penetrating continua has been developed in [Kendzera et al., 2020b]. The equations of motion for the one-dimensional shear deformation of the single layer soil deposit read as follows

$$\rho u_{tt} = G u_{zz} - \rho \int_0^{\infty} m(\Omega) w_{tt} d\Omega,$$

$$w_{tt} + \Omega^2 (w - u) + \Omega^2 \tau (w - u)_t = 0, \quad (1)$$

where $u(z, t)$ and $w(z, t)$ are the horizontal displacements of carrying medium and attached oscillator respectively, and G is the shear modulus. The quantity Ω stands for the natural frequency of a partial oscillator. Assume also that the relaxation time τ is constant for all oscillators. The function $m(x)$ describing the distribution of oscillators over their natural frequencies is chosen as follows

$$m(x) = m\delta(x - \Omega),$$

where $\delta(\circ)$ is the Dirac delta function and the parameter m coincides with the ratio of densities of continua.

It should be noted that in the case of delta distribution, model (1) has no integral term and is reduced to the model with oscillators possessing the identical natural frequencies. In this work, we deal with the generalization of the approach developed in [Kendzera et al., 2020b] to the case of layered soil deposit.

Thus, we consider the layered medium of thickness H (Fig. 1), which is composed of N layers and rests on a rigid base. Each layer is of thickness h_s and contains inclusions (internal

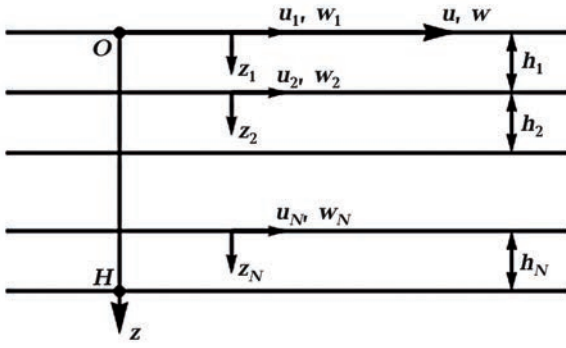


Fig. 1. The scheme of layered soil deposit.

oscillators). In what follows, in each s -th layer the medium is described by the equation of motion (1), so that

$$\begin{aligned} \rho_s (u_s)_{tt} &= \left(G_s (u_s)_z \right)_z - \rho_s m_s (w_s)_{tt}, \\ (w_s)_{tt} + \Omega_s^2 (w_s - u_s) + \Omega_s^2 \tau_s (w_s - u_s)_t &= 0, \\ s &= 1, \dots, N. \end{aligned} \quad (2)$$

As shown in Fig. 1, each layer is subjected to the own reference frame with the origin placed at the upper layer boundary and the axis directed downwards. The typical assumption [Sarma, 1994; Kramer, 1996; Kundu et al., 2019; Mondal et al., 2020] about the absence of stresses at the free ground surface is used:

$$\frac{\partial u_1}{\partial z_1} (z_1 = 0) = 0. \quad (3)$$

We also assume that the bedrock is deformed according to the harmonic law

$$u_N \left(z_N = \sum_{s=1}^N h_s \right) = Q e^{i\omega t}, \quad (4)$$

where Q and ω are the amplitude and frequency of external disturbances respectively. Since we are interested in resonant properties of soil deposit, then it is suitable to assume that disturbances at the bottom edge are of unity amplitude, i. e. $Q = 1$. The value of amplification factor F for the deposits defined as a ratio of displacement amplitudes at its edges [Kramer, 1996; Rivin, 2003; With, Boudare, 2007]

$$F = \frac{|u(z=0; t)|}{|u(z=H; t)|},$$

where $u(z=H; t)$ is the deformation at the depth H , and coincides with the value of displacement at the ground surface.

In contrast to the problem on the single soil layer, the problem on the multilayered medium contains auxiliary conditions related to the conjugation of displacements and stresses at the boundaries between layers. In this work, we use the physically motivated conditions of smoothness of deformations and stresses [Kramer, 1996; Kundu et al., 2019; Mondal et al., 2020]

$$\begin{aligned} u_s (z_s = h_s) &= u_{s+1} (z_{s+1} = 0), \\ G_s \frac{\partial u_s}{\partial z_s} (z_s = h_s) &= G_{s+1} \frac{\partial u_{s+1}}{\partial z_{s+1}} (z_{s+1} = 0), \\ s &= 1, \dots, N-1. \end{aligned} \quad (5)$$

Applying the approach described in works [Kramer, 1996; Kendzera et al., 2020b], the dependency of amplification factor of layered soil deposit on the frequency ω is constructed. To do this, let us derive the solution of model (1)–(3), which relates to the regime of deposit's oscillations with the constant amplitude and frequency ω .

In each layer, the partial solution can be found in the following form

$$u_s = U_s (z_s) e^{i\omega t}, \quad w_s = W_s (z_s) e^{i\omega t}, \quad (6)$$

where

$$U_s = A_s e^{ik_s z_s} + B_s e^{-ik_s z_s}, \quad W_s = \beta_s U_s,$$

$$k_s^2 = \frac{\rho_s}{G_s} \omega^2 \left(1 + \frac{m_s \Omega_s^2 (1 + \tau_s i \omega)}{\Omega_s^2 (1 + \tau_s i \omega) - \omega^2} \right),$$

$$\beta_s = \frac{\Omega_s^2 (1 + \tau_s i \omega)}{\Omega_s^2 (1 + \tau_s i \omega) - \omega^2}.$$

Using the boundary condition (3) the constants A_1 and B_1 can be specified, i. e. $A_1 = B_1 \equiv A$. Then $u_1(z_1, t) = A e^{i\omega t} (e^{ik_1 z_1} + e^{-ik_1 z_1})$. From the condition (4) it follows that

$$A_N e^{ik_N z_N} + B_N e^{-ik_N z_N} = 1. \quad (7)$$

Using the solutions (4), the conditions at the discontinuities can be written in the form of algebraic equation [Kramer, 1996]

$$A_s e^{ik_s h_s} + B_s e^{-ik_s h_s} = A_{s+1} + B_{s+1},$$

$$G_s i k_s \left(A_s e^{ik_s h_s} - B_s e^{-ik_s h_s} \right) = G_{s+1} i k_{s+1} \left(A_{s+1} - B_{s+1} \right),$$

$$s = 1, \dots, N - 1.$$

Solving the together with relation (7) and taking into account $A_1 = B_1 \equiv A$, one obtains the following values of coefficients A_s and B_s [Kramer, 1996]:

$$A_{s+1} = \frac{1}{2} \left[A_s \left(1 + \mu_s \right) e^{ik_s h_s} + B_s \left(1 - \mu_s \right) e^{-ik_s h_s} \right],$$

$$B_{s+1} = \frac{1}{2} \left[A_s \left(1 - \mu_s \right) e^{ik_s h_s} + B_s \left(1 + \mu_s \right) e^{-ik_s h_s} \right],$$

where $\mu_s = \frac{G_s k_s}{G_{s+1} k_{s+1}}$, $s = 1, \dots, N - 1$. It's worth noting that from relations obtained it follows that the coefficients are the function of the quantity A only, i. e. $A_s = A_s(A)$ and $B_s = B_s(A)$. In turn, equation (7) allows one to derive the value of A . Thus, the evaluation of amplification factor F can be realized via the formula

$$F = \frac{\left| A e^{i\omega t} \left(e^{ik_1 z_1} + e^{-ik_1 z_1} \right) \right|_{z_1=0}}{\left| e^{i\omega t} \right|} = |2A|.$$

The resonant curve for the two-layered media. The main features of the analytical treatments presented above can be outlined for the two-layered soil deposit. In this case, it is easy to derive the analytic expression for the quantity

$$A = \frac{1}{2 \left(\cos k_1 h_1 \cos k_2 h_2 - \frac{G_1 k_1}{G_2 k_2} \sin k_1 h_1 \sin k_2 h_2 \right)}.$$

Thus,

$$F = \frac{1}{\left| \cos k_1 h_1 \cos k_2 h_2 - \frac{G_1 k_1}{G_2 k_2} \sin k_1 h_1 \sin k_2 h_2 \right|}. \quad (8)$$

For comparison, it's convenient to take the Kelvin—Voigt medium [Sarma, 1994; Kramer, 1996] obeying the equation of motion

$$\rho_s \frac{\partial^2 V_s}{\partial t^2} = \frac{\partial}{\partial z} \left(G_s \frac{\partial}{\partial z} V_s \right) + \eta \frac{\partial^3 V_s}{\partial t \partial z^2}, \quad (9)$$

where $\eta = 2\xi/\omega$ stands for viscosity. The amplification factor F is defined by the same formula (8), but in this case, we should put $G_1 = G_1^*$, $G_2 = G_2^*$, where $G_s^* = G_s + 2\xi_s i$, $k_s^2 = \omega^2 \rho_s / G_s^*$, $s = 1, 2$.

Numerical simulation of soil response to the harmonic disturbances. To check the analytic studies and develop the procedures for the more general form of functional dependencies of soil characteristics on depth, the numerical approach for evaluation of amplification factor is utilized. During numerical simulations tools incorporated into «Mathematica» system are used. To apply numerical methods, the system (2)—(4) should be adapted. At first, let us fix the reference frame (the point O is the origin, Oz is the axis) as it is shown in Fig. 1. We replace the set of systems with the conjugation conditions at the boundary between layers by the single system with discontinuous coefficients:

$$\rho(z) u_{tt} = \left(G(z) u_z \right)_z - \rho(z) m(z) w_{tt},$$

$$w_{tt} + \Omega^2(z) (w - u) + \Omega^2(z) \tau(z) (w - u)_t = 0,$$

$$\frac{\partial u}{\partial z} (z = 0) = 0,$$

$$u(z = H) = e^{i\omega t}, \quad z \in [0; H]. \quad (10)$$

The functions describing the soil characteristics with depth are defined as follows

$$\begin{aligned} & \left\{ \rho(z); G(z); \Omega^2(z); \tau(z) \right\} = \\ & = \sum_{k=1}^p \Theta(z - z_k) \left\{ \rho_k; G_k, \Omega_k^2; \tau_k \right\}, \end{aligned}$$

where $\Theta(\circ)$ is the Heaviside step function. Next, the discontinuous function $G(z)$ should be smoothed out. To do this, we apply the following procedure:

$$\begin{aligned} G(z) & \approx \tilde{G}(z) = \varphi(z; G_1, G_2, h) = \\ & = \frac{G_2 - G_1}{\pi} \arctan(\varepsilon(z - h)) + \frac{G_2 + G_1}{2}, \quad (11) \end{aligned}$$

where the parameters $G_{1,2}$ define the asymptotic values of function $\tilde{G}(z)$, h represents the coordinate of discontinuity, ε is the rate of smoothness (the function $\tilde{G}(z)$ tends to a step function as $\varepsilon \rightarrow \infty$). When the function $G(z)$ possesses several discontinuities, the similar procedure can be used. Let $h_j, j = 1, \dots, K$ be the coordinates of discontinuities, then

$$\begin{aligned} G(z) & \approx \tilde{G}(z) = \\ & = \sum_{s=1}^{N-1} \varphi \left(z; G_s, G_{s+1}, \sum_{j=1}^s h_j \right) - \sum_{s=2}^{N-1} G_s. \quad (12) \end{aligned}$$

So, the system (10) with prescribed boundary and zero initial conditions is solved by the command NDSolve [...]. The solution is evaluated at a long time interval to provide that all transient processes are passed and the system reaches the steady oscillating regime. We are interested in the solution at free surface ($z = 0$). Namely, it is evaluated the amplitude of free surface oscillations when the steady mode is realized. This amplitude coincides with the amplification factor F due to its definition we are used. Finally, varying the frequency ω and deriving the corresponding values of F , the resonant curve is constructed.

To check the properties of numerical pro-

cedure, we consider the Kelvin—Voigt two-layer ($N = 2$) model (9) with the boundary condition (3), (4). The parameters are fixed as follows:

$$\begin{aligned} \rho_j & = 1.2^j, \quad G_j = 1.3^j, \quad h_j = 1, \quad \xi = 0.05, \\ H & = \sum_{j=1}^N h_j, \quad j = 1, \dots, N, \quad (13) \end{aligned}$$

and, according to relation (11), the function $G(z) = \tilde{G}(z) = \varphi(z; G_1, G_2, h_1)$. The Fig. 2, *a* represents the results of the numerical derivation of resonant curve (points). The analytical expression (8) of amplification factor F is drawn by solid curve which fits the points well. The same numerical simulation was repeated for the five layered soil deposit which is characterized by the same power dependencies (13) but now $N = 5$. The resulting resonant curve is depicted in Fig. 2, *b*.

The similar numerical procedure is used for the estimation of F in the case of two-layered medium with oscillating inclusions. At first, we consider the layers when only their shear module G are different. So, assume that $G_j = 1.3^j, h_j = 1, j = 1, 2$, where as $\rho_1 = \rho_2 = 1, m_1 = m_2 = 0.6, \tau_1 = \tau_2 = 1, \Omega_1 = \Omega_2 = 0.9$. The resulting numerically evaluated values of the amplification factor F are plotted in Fig. 3, *a* with filled points.

For comparison, the analytically derived function F is drawn by the solid line. It is evidence of the perfect fitting of both approaches. Fig. 3, *b* shows the case when both layers do not possess identical characteristics. Thus, $G_j = 1.3^j, h_j = 1, j = 1, 2, \rho_1 = 1, \rho_2 = 1.2, m_1 = 0.6, m_2 = 0.8, \tau_1 = 1, \tau_2 = 1.1, \Omega_1 = 0.9, \Omega_2 = 1.1$. The good fitting of numerical and analytical curves is observed as well. In both cases, there are two resonant frequencies in the range $\omega \in [0.2, 4]$, and the amplification factor for the first resonant frequency ω_1 is much higher than for the second resonant frequency ω_2 . Analytical expression (8) for the amplification factor in the case of two-layer application allows us to analyze how it is affected by the relationship between the parameters of the layers. The contours of the surface $F = F(\gamma, \omega)$ shown in Fig. 4 indicate that the

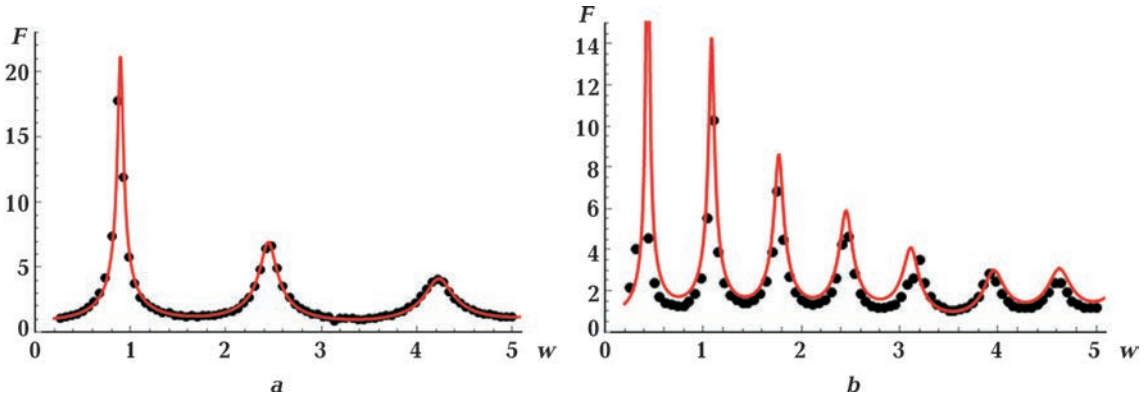


Fig. 2. Amplification factor F versus frequency ω derived for the two-layer (a) and five-layer (b) Kelvin—Voigt model. The solid lines correspond to the analytical solution, and the points represent the results of numerical simulations.

resonant frequencies depend on the ratio of the shear moduli for the second and first layers $\gamma = G_2 / G_1$: when this ratio γ increases, the resonant frequencies shift towards their increase. In addition, in the case of the ratio $\gamma = 1$, the amplification factor F for the first resonant frequency is much higher than for subsequent resonant frequencies. As the ratio γ increases, the amplification factor becomes more uniform for all resonant frequencies. It should be noted that only cases when $\gamma \geq 1$ are analyzed, because the second layer, being under the first layer, is denser, and hence $G_2 > G_1$.

It is also important to analyze the influence of the ratio of natural frequencies of par-

tial oscillators $\theta = \Omega_2 / \Omega_1$ on the dependence $F = F(\omega)$. Fig. 5 shows that there is the range $\theta \in [1, 2]$ that separates the two areas with the different nature of the dependencies $F = F(\omega)$. In the area $\theta \in [0, 1]$ the maxima of the function $F(\omega)$ are shifted toward the low frequencies relative to the maxima in the area $\theta \in [2, 11]$. In the area $\theta \in [1, 2]$ there is almost none except one natural frequency. It should also be noted that in the area $\theta \in [2, 11]$ there is no shift of the maxima of the function $F(\omega)$ with increasing the ratio $\theta = \Omega_2 / \Omega_1$.

The construction of the amplification factor is performed also for the five-layered soil deposit with oscillating inclusions. Used parameters are as follows: $G_j = 1.3^j$, $\rho_j = 1.2^j$,

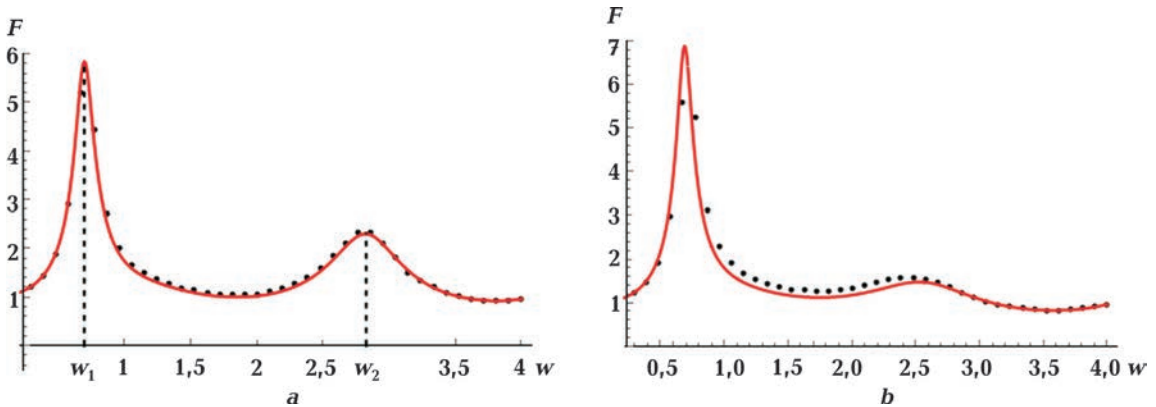


Fig. 3. The dependence of amplification factor F on the frequency ω derived for two-layer soil deposit when the only function $G(z)$ is discontinuous (a) and in addition other functions $m(z)$, $\rho(z)$, $\Omega(z)$, $\tau(z)$ are discontinuous as well (b).

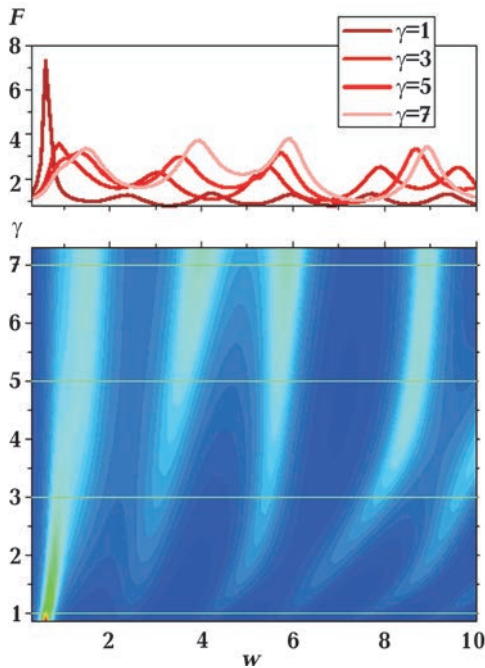


Fig. 4. The dependence of amplification factor F on the frequency ω and the ratio of shear moduli $\gamma = G_2/G_1$ derived for the two-layer model with oscillating inclusions (bottom panel). Amplification factor F versus the frequency ω for the four ratios γ highlighted by the lines on the bottom panel (upper panel).

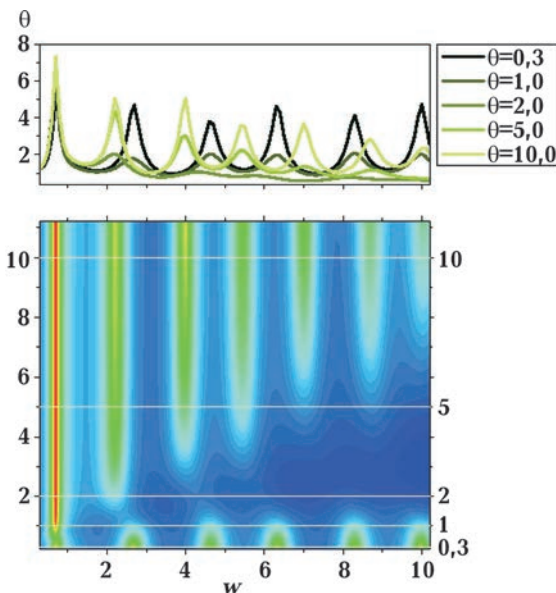


Fig. 5. The dependence of amplification factor F on the frequency ω and the ratio of natural frequencies of partial oscillators $\theta = \Omega_2/\Omega_1$ derived for the two-layer model with oscillating inclusions (bottom panel). Amplification factor F versus frequency ω for the five ratios θ highlighted by the lines on the bottom panel (upper panel).

$m_j = 0.8 + 0.1j$, $\tau_j = 0.5 + 0.02j$, $\Omega_j = 1.5^j$, $h_j = 1$, $j = 1, 2, \dots, 5$. The acceptable fitting is observed as well (see Fig. 6).

Relation to the boundary value problem.

It is worth noting that the estimation of factor F and solving the boundary value problem are related tasks. To show this, consider the system (10) written for the two-layer soil deposit. It is easy to show that the boundary conditions can be reduced to homogenous (zero) by the change of variable $u \rightarrow u - Q e^{i\omega t}$. Then the eigenvalues of the boundary value problem are defined by the system (10) and boundary conditions $u_z(z=0) = u(z=H) = 0$. The auxiliary conditions at the discontinuity at $z = h_1$ coincide with the relations (5). Thus, assuming that all quantities $m(z), G(z), \rho(z), \Omega(z), \tau(z)$ are the step functions and using the solution (6), we derive the solution in the first layer

$$u_1(z) = \frac{e^{ik_1z} + e^{-ik_1z}}{e^{ik_1h_1} + e^{-ik_1h_1}}, \quad w_1(z) = \beta_1 u_1(z)$$

and in the second one

$$u_2(z) = \frac{\theta e^{ik_2(z-h_1)} + e^{-ik_1(z-h_1)}}{\theta + 1},$$

$$w_2(z) = \beta_2 u_2(z), \quad \theta = -e^{-2ik_2(H-h_1)}.$$

Here we take into account zero boundary conditions and the assumption that $u_1(z=h_1) = u_2(z=h_1) = 1$ providing the validity of the first relation of conditions (5). From the second equation of conditions (5) it follows that $G_1(u_1)_z = G_2(u_2)_z$ which, in turn, is reduced to the algebraic equation

$$\frac{G_1 k_1}{G_2 k_2} = \frac{1}{\tan(k_1 h_1) \tan(k_2 h_2)}.$$

The relation obtained is a characteristic equation for the boundary value problem and provides its complex-valued eigenvalues λ_j , $j = 1, 2, \dots$. It is obvious, the natural frequencies of the two-layer medium coincide with the real part of λ_j , i. e. $\omega_j = \text{Re}(\lambda_j)$. In particular, the evaluation of two first natural frequen-

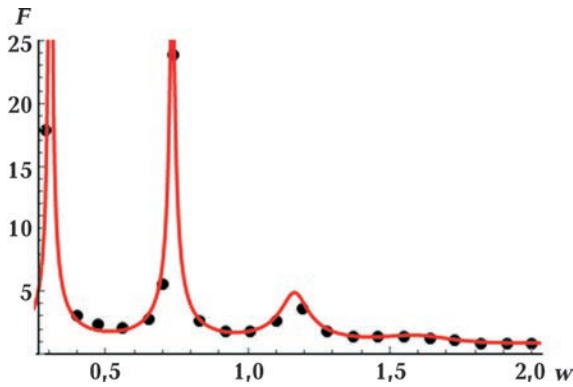


Fig. 6. The dependence of amplification factor F on the frequency ω derived for the five-layer model with oscillating inclusions.

cies ω_1 and ω_2 gives the values 0.698 and 2.826, which coincide perfectly with the maxima in the profile of F (see Fig. 3, *a*). The similar procedure can be developed for the estimation of eigenfrequencies of multilayered deposit.

Concluding remark. The presented research is concerned with the assessment of resonant properties of multi-layered non-homogenous soil deposits. To describe the dynamics of these media, the mathematical model in the form of mutually penetrating continua was used. The procedure for amplification factor evaluation was adapted on the basis of

this model. The good agreement of numerical and analytical results on the amplification factor evaluation was obtained. For a two-layer deposit, the influence of the ratios of the shear moduli and the natural frequencies of the oscillatory inclusions for the two layers on the amplification factor is analyzed. Moreover, we have shown that maxima in the amplification factor profile correspond to the eigenfrequencies of boundary value problem.

The obtained findings contribute to the improvement of methods for response assessment of soil deposits to seismic waves. These results and the proposed theoretical approaches provide increased protection of artificially created objects from seismically dangerous influences [With, 2007]. The related branches of science [Li, 2000; Smolyakov et al., 2010; Mondal et al., 2020] can be interested in the results as well.

The work is partially supported by the project 0118U000044 «Investigation of critical phenomena and other manifestations of self-organization in structured geoenvironments to assess seismic risks» by the decree of the Bureau of the Department of Earth Sciences of the National Academy of Sciences of Ukraine dated May 16, 2017, No. 6, item 54.

References

- Adimoolam, B., & Banerjee, S. (Eds.). (2019). *Soil Dynamics and Earthquake Geotechnical Engineering*. Springer Nature Singapore, 274 p.
- Bardet, J.P., Ichii, K., & Lin, C.H. (2000). *EERA: A Computer program for Equivalent-linear Earthquake Site Response Analysis of Layered soil deposits*. Department of Civil Engineering, University of Southern California. Retrieved from <http://www.ce.memphis.edu/7137/PDFs/EERA2/EERAManual.pdf>.
- Danylenko, V.A., Danevych, T.B., Makarenko, O.S., Vladimirov, V.A., & Skurativskyi, S.I. (2011). *Self-organization in nonlocal non-equilibrium media*. Kyiv: S.I. Subbotin Institute of Geophysics, NAS of Ukraine, 333 p.
- Danylenko, V.A., & Skurativskyi, S.I. (2017). Dynamics of Waves in the Cubically Nonlinear Model for Mutually Penetrating Continua. *Discontinuity, Nonlinearity, and Complexity*, 6(4), 425—433. <https://doi.org/10.5890/DNC.2017.12.002>.
- Danylenko, V.A., & Skurativskyi, S.I. (2016). Peculiarities of wave dynamics in media with oscillating inclusions. *International Journal of nonlinear Mechanics*, 84, 31—38. <https://doi.org/10.1016/j.ijnonlinmec.2016.04.010>.
- Danilenko, V.A., & Skurativskyi, S.I. (2008). Resonant modes of propagation of nonlinear wave fields in media with oscillating inclusions. *Dopovidi NAN Ukrainy*, (11), 108—112 (in Ukrainian).
- Danylenko, V.A., & Skurativskyi, S.I. (2012). Travelling Wave Solutions of Nonlocal Models for Media with Oscillating Inclusions. *Nonlinear Dynamics and Systems Theory*, 12(4), 365—374.

- Eringen, A.C. (1999). *Microcontinuum Field Theory. Vol. I. Foundations and Solids*. New York: Springer, 341 p. <https://doi.org/10.1007/978-1-4612-0555-5>.
- Erofeev, V.I. (2003). *Wave Processes in Solids with Microstructure*. Singapore: World Scientific, 276 p.
- Green, A.E., & Rivlin, R.S. (1964). Multipolar continual mechanics. *Archive for Rational Mechanics and Analysis*, 17(2), 113—147. <https://doi.org/10.1007/BF00253051>.
- Gutowski, T.G., & Dym, C.L. (1976). Propagation of ground vibration: A review. *Journal of Sound and Vibrations*, 49(2), 179—193. [https://doi.org/10.1016/0022-460X\(76\)90495-8](https://doi.org/10.1016/0022-460X(76)90495-8).
- Hashash, Y. (2012). *Deep Soil User Manual and Tutorial*. Department of Civil and Environmental Engineering University of Illinois at Urbana-Champaign. Board of Trustees of University of Illinois at Urbana-Champaign. 107 p.
- Hosseini, M.M.S.M., & Pajouh, A.M. (2010). Comparative study on the equivalent linear and the fully nonlinear site response analysis approaches. *Arabian Journal of Geosciences*, 5(4), 587—597. <https://doi.org/10.1007/s12517-010-0228-9>.
- Ishihara, K. (1996). *Soil Behaviour in Earthquake Geotechnics*. Oxford University Press, USA, 360 p.
- Kaliski, S., Rymarz, Cz., Sobczyk, K., & Włodarczyk, E. (1992). *Vibrations and Waves. Part B: Waves*. Warsaw: Elsevier, 382 p.
- Kausel, E., & Roësset, J.M. (1984). Soil amplification: some refinements. *International Journal of Soil Dynamics and Earthquake Engineering*, 3(3), 116—123. [https://doi.org/10.1016/0261-7277\(84\)90041-X](https://doi.org/10.1016/0261-7277(84)90041-X).
- Kenzera, O.V., Mykulyak, S.V., Semenova, Yu.V., & Skurativskiy, S.I. (2020a). Modeling of seismic response of soil layer within the framework of nonlocal model of continuous medium. *Geofizicheskij Zhurnal*, 42(3), 47—58. <https://doi.org/10.24028/gzh.0203-3100.v42i3.2020.204700> (in Ukrainian).
- Kenzera, O.V., Mykulyak, S.V., Semenova, Yu.V., Skurativska, I.A., & Skurativskiy, S.I. (2020b). Assessment of seismic response of a soil layer with the oscillating inclusions. *Geofizicheskij Zhurnal*, 42(4), 47—58. <https://doi.org/10.24028/gzh.0203-3100.v42i4.2020.210669>.
- Kramer, S.L. (1996). *Geotechnical Earthquake Engineering*. N. J., Prentice Hall, Upper Saddle River, 672 p.
- Kumar, D., Kundu, S., Kumhar, R., & Gupta, S. (2020). Vibrational analysis of Love waves in a viscoelastic composite multilayered structure. *Acta Mechanica*, 231, 4199—4215. <https://doi.org/10.1007/s00707-020-02767-8>.
- Kundu, S., Alam, P., & Gupta, S. (2019). Shear waves in magneto-elastic transversely isotropic (MTI) layer bonded between two heterogeneous elastic media. *Mechanics of Advance Materials and Structures*, 26(5) 407—415. <https://doi.org/10.1080/15376494.2017.1400614>.
- Li, Q.S. (2000). An exact approach for free flexural vibrations of multistep no uniform beams. *Journal of Vibration and Control*, 6, 963—983. <https://doi.org/10.1177/107754630000600701>.
- Mandal, A., Baidya, D.K., & Roy, D. (2012). Dynamic Response of the Foundations Resting on a Two-layered Soil Underlain by a Rigid Layer. *Geotechnical and Geological Engineering*, 30, 775—786. <https://doi.org/10.1007/s10706-012-9497-2>.
- Mishuris, G.S., Movchan, A.B., & Slepian, L.I. (2019). Waves in elastic bodies with discrete and continuous dynamic microstructure. *Philosophical Transactions of the Royal Society A*, 378(2162). <https://doi.org/10.1098/rsta.2019.0313>.
- Mondal, D., Kundu, P., & Sarkar (Mondal), S. (2020). Accumulation of Stress and Strain due to an Infinite Strike-Slip Fault in an Elastic Layer Overlying a Viscoelastic Half Space of Standard Linear Solid (SLS). *Pure and Applied Geophysics*, 177, 4643—4656. <https://doi.org/10.1007/s00024-020-02536-7>.
- Palmov, V.A. (1969). On a model of a medium with complex structure. *Journal of Applied Mathematics and Mechanics*, 33(4), 768—773.
- Pratt, T.L., Horton, J.W., Jr. Muñoz, J., Hough, S.E. Chapman, M.C., & Olgun, C.G. (2017). Am-

- plification of earthquake ground motions in Washington, DC, and implications for hazard assessments in central and eastern North America. *Geophysical Research Letters*, 44(24), 12,150—12,160. <https://doi.org/10.1002/2017GL075517>.
- Rivin, E.I. (2003). *Passive Vibration Isolation*. New York: ASME Press, 432 p.
- Sarma, K.S. (1994). Analytical solution to the seismic response of viscoelastic soil layers. *Géotechnique*, 44(2), 265—275. <https://doi.org/10.1680/geot.1994.44.2.265>.
- Schnabel, P.B., Lysmer, J., & Seed, H.B. (1972). *SHAKE: A computer program for earthquake response analysis of horizontally layered sites*. Report No. EERC 72-12. Berkeley, California: Earthquake Engineering Research Center, University of California, 102 p.
- Slepjan, L.I. (1967). The wave of deformation in rods with amortized mass. *Mechanics of Solids*, 5, 34—40.
- Smolyakov, A.I., Fourkal, E., & Krasheninnikov, S.I. (2010). Resonant modes and resonant transmission in multi-layer structures. *Progress in Electromagnetic Research*, 107, 293—314. <https://doi.org/10.2528/PIER10032706>.
- Takemiya, H. & Yamada, Y. (1981). Layered soil-pile-structure dynamic interaction. *Earthquake engineering and structural dynamics*, 9(5), 437—457. <https://doi.org/10.1002/eqe.4290090504>.
- With, C. & Bodare, A. (2007). Prediction of train-induced vibrations inside buildings using transfer functions. *Soil Dynamics and Earthquake Engineering*, 27(2), 93—98. <https://doi.org/10.1016/j.soildyn.2006.06.003>.

Сейсмічна реакція шаруватої ґрунтової товщі з включеннями

**О.В. Кендзера, С.В. Микуляк, Ю.В. Семенова,
І.А. Скуратівська, С.І. Скуратівський, 2021**

Інститут геофізики ім. С.І. Субботіна НАН України,
Київ, Україна

Відомо, що ґрунтові масиви можуть підсилювати або послаблювати сейсмічні хвилі, генеровані землетрусами. Тому задача дослідження впливу ґрунтових товщ на проходження сейсмічних хвиль важлива з позиції експлуатації споруд та проектування нових сейсмостійких об'єктів. Ґрунтові товщі, на яких здійснюється забудова, здебільшого мають шарувату структуру. Матеріал цих шарів також суттєво неоднорідний. Для опису динаміки неоднорідного ґрунтового масиву використано модель пружного континууму з осцилюючими невзаємодіючими включеннями. В рамках цієї моделі проаналізовано резонансні властивості багатошарового ґрунтового масиву в умовах гармонічного збурення, прикладеного до нижньої межі масиву. На підставі розв'язку крайової задачі про коливання такої системи з вільною верхньою поверхнею та умовами спряження на межах прошарків отримано передавальну функцію, яка характеризує підсилення поперечних зміщень шаруватою системою. В межах задач про коливання дво- та п'ятишарової систем аналітичні дослідження було підтверджено числовим розрахунком передавальних функцій. Зокрема, з використанням вбудованої функції системи «Mathematica» розроблено процедуру обчислення частотних залежностей коефіцієнта підсилення для шаруватих середовищ Кельвіна—Фойгта та середовищ з коливними включеннями. Для двошарової системи також проаналізовано вплив на передавальну функцію відношення модулів зсуву матеріалів двох шарів і відношення власних частот включень. Показано, що максимуми у передавальній функції відповідають власним частотам крайової зада-

чі. Отримані результати та запропонований підхід до вивчення відгуку шаруватого неоднорідного середовища на коливальні збурення можуть бути теоретичним підґрунтям для сейсмостійкого проектування та будівництва.

Ключові слова: шарувата ґрунтова товща, амплітудно-частотна характеристика, резонансні явища, моделі неоднорідних геосередовищ, сейсмостійкість, моделювання реакції ґрунту на сейсмічні впливи.

Сейсмическая реакция слоистой грунтовой толщи с включениями

*А. В. Кендзера, С. В. Микуляк, Ю. В. Семенова,
И. А. Скуратовская, С. И. Скуратовский, 2021*

Институт геофизики им. С.И. Субботина НАН Украины, Киев, Украина

Известно, что грунтовые массивы могут усиливать или ослаблять сейсмические волны, генерируемые землетрясениями. Поэтому исследование влияния грунтовых толщ на скорость прохождения сейсмических волн важна с точки зрения эксплуатации сооружений и проектирования новых сейсмостойких объектов. Грунтовые толщи, на которых ведется строительство, в основном имеют слоистую структуру. Материал этих слоев также существенно неоднородный. Для описания динамики неоднородного грунтового массива использована модель упругого континуума с осциллирующими невзаимодействующими включениями. В рамках этой модели проанализированы резонансные свойства многослойного грунтового массива в условиях гармонического возмущения, приложенного к нижней границе массива. На основании решения краевой задачи о колебаниях такой системы со свободной верхней поверхностью и условиями сопряжения на границах слоев получена передаточная функция, которая характеризует усиление поперечных смещений слоистой системой. В рамках задач о колебаниях двух- и пятислойных систем аналитические исследования были подтверждены числовым расчетом передаточных функций. В частности, с использованием встроенных функций системы «Mathematica» разработана процедура вычисления частотных зависимостей коэффициента усиления для слоистых сред Кельвина—Фойгта и сред с колеблющимися включениями. Для двухслойной системы также проанализировано влияние на передаточную функцию отношения модулей сдвига материалов двух слоев, а также отношения собственных частот включений. Показано, что максимумы в передаточной функции соответствуют собственным частотам краевой задачи. Полученные результаты и предложенный подход к изучению отклика слоистой неоднородной среды на колебательные возмущения могут служить теоретическим основанием для сейсмостойкого проектирования и строительства.

Ключевые слова: слоистая грунтовая толща, амплитудно-частотная характеристика, резонансные явления, модели неоднородных геосред, сейсмостойкость, моделирование реакции ґрунту на сейсмические воздействия.